

PX-110/PX-310/PX-700 MIDI Implementation

Contents

Part I MIDI Message Overview

1	Product Configuration as a MIDI Device.....	6
1.1	Controller Block.....	6
1.2	Sound Source Block.....	6
1.3	Sound Source Common Sub-blocks.....	6
1.4	Part Sub-blocks.....	7
1.5	MIDI Send by Auto Accompaniment or Song Memory (PX-110/PX-310)	7
2	Different Operations Depending on Part Mode.....	7

Part II Channel Message

3	Receive Channel.....	8
4	Send Channel	8
5	Note Off.....	8
6	Note On.....	8
7	Polyphonic Key Pressure.....	9
8	Control Change.....	9
8.1	Bank Select (00H).....	9
8.2	Modulation (01H).....	9
8.3	Data Entry (06H,26H).....	10
8.4	Volume (07H).....	10
8.5	Pan (0AH)	10
8.6	Expression (0BH)	11
8.7	General Use Controller 1 through 8 (10H through 13H, 50H through 53H) Format.....	11
8.8	Damper (40H)	12
8.9	Sostenuto (42H).....	12
8.10	Soft (43H).....	13
8.11	Envelope Release Time (48H).....	13
8.12	Envelope Attack Time (49H)	13
8.13	Filter Cutoff (4AH)	14
8.14	Filter Resonance (47H).....	14
8.15	Vibrato Rate (4CH).....	14
8.16	Vibrato Depth (4DH).....	15
8.17	Vibrato Delay (4EH)	15

8.18	Reverb Send (5BH).....	15
8.19	Chorus Send (5DH).....	16
8.20	NRPN (62H,63H)	16
8.20.1	Filter Cutoff.....	16
8.20.2	Filter Resonance.....	16
8.21	RPN (64H,65H)	17
8.21.1	Pitch Bend Sensitivity	17
8.21.2	Fine Tune.....	17
8.21.3	Coarse Tune.....	18
8.21.4	Modulation Depth.....	18
8.21.5	Null.....	18
8.22	All Sound Off (78H).....	19
8.23	Reset All Controllers (79H)	19
9	Mode Message	19
9.1	All Notes Off (7BH).....	19
9.2	Omni Off (7CH)	19
9.3	Omni On (7DH)	20
9.4	Mono (7EH).....	20
9.5	Poly (7FH)	20
10	Program Change.....	20
10.1	About the Part Mode	20
11	Channel Aftertouch	21
12	Pitch Bend.....	21

Part III System Message

13	Active Sensing	22
14	System Exclusive Message	22
14.1	Universal Realtime System Exclusive Message	22
14.1.1	Master Volume.....	22
14.1.2	Master Balance.....	23
14.1.3	Master Fine Tuning	23
14.1.4	Master Coarse Tuning	23
14.1.5	Reverb Parameter	24
14.1.6	Chorus Parameter	24
14.1.7	GM System Message.....	26
14.1.8	GS Message	27
14.2	PX-110/PX-310/PX-700 System Exclusive Message	27

Part IV PX-110/PX-310/PX-700 System Exclusive Message

15	Format.....	28
15.1	Message Classifications.....	28
15.2	Message Structures	28
15.2.1	1...SYSEX : System Exclusive message Status	28
15.2.2	2...MAN : Manufacturer's ID	29
15.2.3	3...MOD : Model ID	29
15.2.4	4...dev : MIDI Device ID 00H through 1FH,7FH	29

15.2.5	5... <i>act</i> : Action	29
15.2.6	6... <i>cat</i> : Category	30
15.2.7	7... <i>prm</i> : Parameter ID	30
15.2.8	8... <i>ilen/dlen</i> : index length / data length	30
15.2.9	9... <i>ps</i> : Parameter Set Number	31
15.2.10	10... <i>index</i> Parameter Index Number	31
15.2.11	11... <i>data</i> Parameter Data	32
15.2.12	12... <i>sum</i> Check Sum	34
15.2.13	14...EOX : End of System Exclusive Message	34
16	Parameter Unit Operations	34
17	Parameter Set Transfer Mode (PX-310)	35
17.1	Communication Modes	35
17.1.1	One-way and Handshake	35
17.1.2	Session and Subsession	35
17.2	One-way Mode Communication Flow	36
17.3	Handshake Mode Communication Flow	36

Part V Parameter List

18	Command Parameter.....	39
18.1	System Parameter List.....	39
18.2	Data Management Command Parameter List.....	40
18.3	Command Parameter List	41
19	Patch Parameter	43
19.1	Patch Common Parameter List	43
19.2	Patch Part Parameter List	47
20	SMF Data Parameter (PX-310).....	49
20.1	SMF Data Information	49

Part VI Parameter Set List

21	SMF Parameter Set (PX-310).....	50
22	About Parameter Set (PS) numbers	50

Part VII DSP Parameter List

23	DSP Algorithm List (Single Effect)	51
23.1	Algorithm 00 (00H) : Auto Pan	51
23.2	Algorithm 01 (01H) : Tremolo	51
23.3	Algorithm 02 (02H) : 2BandEQ	51
23.4	Algorithm 03 (03H) : 3BandEQ	51
23.5	Algorithm 04 (04H) : LFO Wah	51
23.6	Algorithm 05 (05H) : Auto Wah	51
23.7	Algorithm 06 (06H) : Compressor	52
23.8	Algorithm 07 (07H) : Limiter	52
23.9	Algorithm 08 (08H) : Distortion.....	52
23.10	Algorithm 09 (09H) : Stereo Phaser	52

23.11	Algorithm 10 (0AH) : Phaser	52
23.12	Algorithm 11 (0BH) : Rotary	52
23.13	Algorithm 12 (0CH) : Overdrive - Rotary	52
23.14	Algorithm 13 (0DH) : Enhancer	52
23.15	Algorithm 14 (0EH) : Ring Modulator	53
23.16	Algorithm 15 (0FH) : LoFi	53
23.17	Algorithm 16 (10H) : 1-Phase Chorus	53
23.18	Algorithm 17 (11H) : Sin 2-Phase Chorus	53
23.19	Algorithm 18 (12H) : 3-Phase Chorus	53
23.20	Algorithm 19 (13H) : Tri 2-Phase Chorus	53
23.21	Algorithm 20 (14H) : Stereo Delay 1	53
23.22	Algorithm 21 (15H) : Stereo Delay 2	53
23.23	Algorithm 22 (16H) : 3-Tap Delay	54
23.24	Algorithm 23 (17H) : Gate Reverb	54
23.25	Algorithm 24 (18H) : Reverse.....	54
23.26	Algorithm 25 (19H) : Reflection	54
23.27	Algorithm 26 (1AH) : Flanger	54
23.28	Algorithm 27 (1BH) : Reverb	54
23.29	Algorithm 28 (1CH) : 2-Tap Delay	54
23.30	Algorithm 29 (1DH) : Pedal Effect.....	54
24	DSP Algorithm List (Multi Effect).....	55
24.1	Algorithm M00 (20H) : Multi00	55
24.2	Algorithm M01 (21H) : Multi01	55
24.3	Algorithm M02 (22H) : Multi02	55
24.4	Algorithm M03 (23H) : Multi03	55
24.5	Algorithm M04 (24H) : Multi04	55
24.6	Algorithm M05 (25H) : Multi05	56
24.7	Algorithm M06 (26H) : Multi06	56
24.8	Algorithm M07 (27H) : Multi07	56
24.9	Algorithm M08 (28H) : Multi08	56
24.10	Algorithm M09 (29H) : Multi09	56
24.11	Algorithm M10 (2AH) : Multi10	56
24.12	Algorithm M11 (2BH) : Multi11	56
24.13	Algorithm M12 (2CH) : Multi12.....	57
24.14	Algorithm M13 (2DH) : Multi13.....	57
24.15	Algorithm M14 (2EH) : Multi14	57
24.16	Algorithm M15 (2FH) : Multi15	57
24.17	Algorithm M16 (30H) : Multi16	57
24.18	Algorithm M17 (31H) : Multi17	57
24.19	Algorithm M18 (32H) : Multi18	58
24.20	Algorithm M19 (33H) : Multi19	58
24.21	Algorithm M20 (34H) : Multi20	58
24.22	Algorithm M21 (35H) : Multi21	58
24.23	Algorithm M22 (36H) : Multi22	58
24.24	Algorithm M23 (37H) : Multi23	58
24.25	Algorithm M24 (38H) : Multi24	59
24.26	Algorithm M25 (39H) : Multi25	59
24.27	Algorithm M26 (3AH) : Multi26	59
24.28	Algorithm M27 (3BH) : Multi27	59
24.29	Algorithm M28 (3CH) : Multi28.....	59
24.30	Algorithm M29 (3DH) : Multi29.....	59
24.31	Algorithm M30 (3EH) : Multi30	60
24.32	Algorithm M31 (3FH) : Multi31	60

Part VIII Setting Values and Send/Receive Values

25	Setting Value Table.....	60
25.1	Off/On Setting Value Table	60
25.2	Damper Pedal Operation Value Table	60
25.3	Slow/Fast Setting Value Table	60
25.4	Rotate/Break Setting Value Table.....	60
25.5	-24 - 0 - 24 Setting Value Table	60
25.6	-64 - 0 - 63 Setting Value Table	60
25.7	Pan Setting Value Table	60
25.8	-99 - 0 - 99 Setting Value Table	61
25.9	Type 0 to Type 7 Setting Value Table	61
25.10	Reverb Type Setting Value Table	61
25.11	Chorus Type Setting Value Table	61
25.12	Equalizer Low Frequency Setting Value Table	61
25.13	Equalizer Mid Low Frequency Setting Value Table	61
25.14	Equalizer High Frequency Setting Value Table	61
25.15	Equalizer Gain Setting Value Table	62
25.16	DSP Algorithm ID Table	62
25.17	Drawbar Position Setting Value Table	62
25.18	DSP Preset List.....	63

Part IX MIDI Implementation Notation

25.19	Hexadecimal Notation.....	64
25.20	Binary Notation.....	64

Part I

MIDI Message Overview

1 Product Configuration as a MIDI Device

The Instrument consists of a controller component and a sound source component as described below.

- Controller Block
 - Keyboard
 - Pedals
 - Auto accompaniments (PX-110/PX-310)
 - Song Memory (PX-110/PX-310)
- Sound Source Block
 - Common Sub-blocks
 - * Sound source all-part common sub-block
 - * Mixer all-part common sub-block
 - * Effector sub-block (DSP, Reverb, Chorus, Master EQ)
 - Channel Independent Sub-blocks (1 to 16)
 - * Sound source part independent sub-block
 - * Mixer part independent sub-block

1.1 Controller Block

The Controller Block issues messages in accordance with real-time controllers (keyboard and pedals), song memory, and auto accompaniment functions (PX-110, PX-310). An operation causes the corresponding message to be sent to the sound source and from MIDI OUT.

The Controller Block normally sends data that is played as-is. When MIDI Chord Judge is turned on, however, chord judgment is performed on received note data and the applicable auto accompaniment play data is sent. Accompaniment part send/song memory messages are sent when the Instrument's Accomp/song MIDI Out setting is turned on (PX-110/PX-310).

The send message channel number corresponds to the Instrument's part number.

1.2 Sound Source Block

The Sound Source Block consists of effectors and other common sub-blocks, and independent instruments for each channel. It operates in accordance with receive MIDI messages. Setting data can also be sent, depending on external requests.

1.3 Sound Source Common Sub-blocks

The Sound Source Sub-blocks include sound source settings that are not dependent on sound source parts; namely effectors, a mixer master sub-block, etc.

Basically, common sub-group parameters can be controlled using system exclusive messages, but a number of parameters can be controlled using channel messages.

Some effector parameters of the effector DSP settings depend on the channel message of the channel number specified by the MIDI Global Channel (see "MIDI Channel Number" in section 8.7).

1.4 Part Sub-blocks

The parts of the sound source can be operated and their settings can be changed with system exclusive messages or channel messages. The following table shows the fixed relationships between the part numbers and channel numbers of channel messages.

Sound Source Part	Receive MIDI Channel	Assigned Function	Description	Remarks
01	01	Keyboard	Normally used	
02	02	Keyboard	Used for Layer	
03	03	Keyboard	Used for Split	Piano tune SMF left-hand data
04	04	-		Piano tune SMF right-hand data
05	05	-		
06	06	Accompaniment	Chord1	PX-110/PX-310 only
07	07	Accompaniment	Chord2	PX-110/PX-310 only
08	08	Accompaniment	Chord3	PX-110/PX-310 only
09	09	Accompaniment	Bass	PX-110/PX-310 only
10	10	Accompaniment	Drum	PX-110/PX-310 only
11	11	Song Memory	Track1 melody	
12	12	Song Memory	Track2	
13	13	-	-	
14	14	-	-	
15	15	-	-	
16	16	-	-	

1.5 MIDI Send by Auto Accompaniment or Song Memory (PX-110/PX-310)

This document provides information about which operations are sent by each message. Note however, that auto accompaniment and Song Memory auto accompaniment operations that include playback data can cause any MIDI message to be sent, and so they are not included here.

Also note that auto accompaniment and Song Memory play data is sent only when the Accomp/Song MIDI Out item is turned on.

2 Different Operations Depending on Part Mode

Each Part Mode (see 10.1 "About the Part Mode"), which is the sound source operational mode, has different messages for performing operations upon receipt. Each message is explained in the applicable message sections of this document.

Part II

Channel Message

3 Receive Channel

The channel number of the channel message received by each part is explained in the table in "1.4 Part Sub-blocks".

The MIDI Channel of messages that can change effect settings is determined by the MIDI Channel, which is described in the footnote titled "MIDI Channel Number" in section 8.7.

4 Send Channel

The MIDI channel of the channel message sent in accordance with a play operation, tone, or other setting operation is basically a value that corresponds to the part being played and the part being manipulated. Note, however, this Instrument's keyboard main sent channel allocation can be changed by a value set by the Keyboard Channel.

5 Note Off

Format

Message Format:	9nH kkH 00H 8nH kkH **H (receive only)
n:	MIDI Channel Number
kk:	Key Number
**:	Ignored

Send

Sent when something is played on the keyboard.

Receive

Received over MIDI channels that correspond to each part. The velocity value is ignored.

6 Note On

Format

Message Format:	9nH kkH vvH
n:	MIDI Channel Number
kk:	Key Number
vv:	Velocity

Send

Sent when something is played on the keyboard.

Receive

Received over MIDI channels that correspond to each part.

7 Polyphonic Key Pressure

Format

Message Format:	AnH kkH vvH
n:	MIDI Channel Number
kk:	Key Number
vv:	Pressure Value

Send Operation

This message is not sent when the Instrument is operated.

Receive Operation

This message is not received.

8 Control Change

Format

Message Format:	BnH ccH vvH
n:	MIDI Channel Number
cc:	Control Number
vv:	Value

Send

Sent when the Instrument's pedal is operated.

Receive

Receipt changes the Instrument's mode or the corresponding parameter.

8.1 Bank Select (00H)

Format

Message Format:	BnH 00H vvH (MSB) BnH 20H **H (LSB)
n:	MIDI Channel Number
vv:	Value
**:	Ignored

Send

Sent when a tone is selected. See the "Tone List" of the Instrument's User's Guide for details.

Receive

Receipt causes a change in the tone bank number stored in Instrument memory, but the tone is not actually changed until Program Change is received. For details, see "10 Program Change" in this document, and the "Tone List" in the Instrument's User's Guide.

8.2 Modulation (01H)

Format

Message Format:	BnH 01H vvH
n:	MIDI Channel Number
vv:	Value

Send

This message is not sent when the Instrument is operated.

Receive

Receipt adds vibrato of a depth specified by the value to the tone being sounded. In the case of a tone that already has vibrato applied, receipt of this message increases the vibrato depth.

8.3 Data Entry (06H, 26H)

Format

Message Format:	BnH 06H vvH (MSB) BnH 26H vvH (LSB)
n:	MIDI Channel Number
vv:	Value

Send

Sent when tuning is changed.

Receive

Receipt changes the parameters assigned to NRPN and RPN.

8.4 Volume (07H)

Format

Message Format:	BnH 07H vvH
n:	MIDI Channel Number
vv:	Value (Note1)

Note 1:

The setting value matches the value that is sent and received.

Send

This message is not sent when the Instrument is operated.

Receive

Changes Part Volume.

8.5 Pan (0AH)

Format

Message Format:	BnH 0AH vvH
n:	MIDI Channel Number
vv:	Value (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.7 Pan Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the mixer part pan setting.

8.6 Expression (0BH)

Format

Message Format:	BnH 0BH vvH
n:	MIDI Channel Number
vv:	Value (Note1)

Note 1:

The setting value matches the value that is sent and received.

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Expression value.

8.7 General Use Controller 1 through 8 (10H through 13H, 50H through 53H) Format

Format

Message Format:	BnH 10H vvH BnH 11H vvH BnH 12H vvH BnH 13H vvH BnH 50H vvH BnH 51H vvH BnH 52H vvH BnH 53H vvH	DSP Parameter 0 DSP Parameter 1 DSP Parameter 2 DSP Parameter 3 DSP Parameter 4 DSP Parameter 5 DSP Parameter 6 DSP Parameter 7
	n:MIDI Channel Number (Note1)	
	vv:Value (Note2)	

Note 1: MIDI Channel Number

The MIDI channel for manipulating DSP parameters with control change messages is called the "Global Channel". The initial factory default Global Channel is Channel 1.

The Global Channel cannot be changed with an Instrument operation. You need to use a System Exclusive Message to change the Global Channel. For details about messages, "Global Channel" under "19.1 Patch Common Parameter List".

Note 2: Value

The range for a value that can be sent by any of the parameters is 0 to 127. Note, however, that the parameter values that can actually be set and the corresponding send value depend on the parameter.

The same values are used for when manipulating DSP parameters with System Exclusive Messages. For more information, see the "Part VII DSP Parameter List".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the DSP Parameter value. Any message received that corresponds to a parameter whose number exceeds the number of parameters for the currently selected DSP is ignored.

8.8 Damper (40H)

Format

Message Format:	BnH 40H vvH
n:	MIDI Channel Number
vv:	Value

Send

Sent when the damper pedal is operated.

For send values, see "25.2 Damper Pedal Operation Value Table" in "VIII Setting Values and Send/Receive Values".

Receive

Receipt performs an operation equivalent to a damper pedal operation.

The operation that corresponds to the received value depends on whether or not a piano tone (Piano Mode selected for the Part Mode) is selected.

Piano Tones

For a piano tone, attenuation speed is changed sequentially in accordance with the received value.

For a non-piano tone, two operations are performed: on and off. For information of the range of values interpreted as on and the range of values interpreted as off, see "25.1 Off/On Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Pedal Effect

Pedal Effect is used for piano tones. When it is selected, the depth of the resonance can be continually altered in accordance with the received value. When multiple parts are using Pedal Effect, however, the damper pedal values of each part are compared, and the largest one is used for Pedal Effect.

8.9 Sostenuto (42H)

Format

Message Format:	BnH 42H vvH
n:	MIDI Channel Number
vv:	Value (Notel)

Note 1:

For information about the relationship between setting values and send/receive values, see the "25.1 Off/On Setting Value Table" in "Part VIII Setting Values and Send/Receive Values."

Send

Sent when sostenuto pedal of the damper pedal that has been assigned the sostenuto pedal function is operated.

Receive

Receipt performs an operation equivalent to a sostenuto pedal operation.

8.10 Soft (43H)

Format

Message Format:	BnH 40H vvH
n:	MIDI Channel Number
vv:	Value (Note 1)

Note 1:

For information about the relationship between setting values and send/receive values, see the "25.1 Off/On Setting Value Table" in "Part VIII Setting Values and Send/Receive Values."

Send

Sent when soft pedal of the damper pedal that has been assigned the soft pedal function is operated.

Receive

Receipt performs an operation equivalent to a soft pedal operation.

8.11 Envelope Release Time (48H)

Format

Message Format:	BnH 43H vvH
n:	MIDI Channel Number
vv:	Value (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.6 -64 - 0 - 63 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Release Time of the Patch Parameter.

8.12 Envelope Attack Time (49H)

Format

Message Format:	BnH 49H vvH
n:	MIDI Channel Number
vv:	Value (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.6 -64 - 0 - 63 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Attack Time of the Patch Parameter.

8.13 Filter Cutoff (4AH)

Format

Message Format:	BnH 43AH vvH
n:	MIDI Channel Number
vv:	Value (Note 1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.6 -64 - 0 - 63 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Filter Cutoff of the Patch Parameter.

8.14 Filter Resonance (47H)

Format

Message Format:	BnH 48H vvH
n:	MIDI Channel Number
vv:	Value (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.6 -64 - 0 - 63 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Filter Resonance of the Patch Parameter.

8.15 Vibrato Rate (4CH)

Format

Message Format:	BnH 4CH vvH
n:	MIDI Channel Number
vv:	Value (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.6 -64 - 0 - 63 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Vibrato Rate of the Tone Parameter.

8.16 Vibrato Depth (4DH)

Format

Message Format:	BnH 4DH vvH
n:	MIDI Channel Number
vv:	Value (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.6 -64 - 0 - 63 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Vibrato Depth of the Tone Parameter.

8.17 Vibrato Delay (4EH)

Format

Message Format:	BnH 4EH vvH
n:	MIDI Channel Number
vv:	Value (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.6 -64 - 0 - 63 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Vibrato Delay of the Tone Parameter.

8.18 Reverb Send (5BH)

Format

Message Format:	BnH 5BH vvH
n:	MIDI Channel Number
vv:	Value (Note1)

Note 1:

The setting value matches the value that is sent and received.

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Reverb Send of Mixer Part 1 through 16.

8.19 Chorus Send (5DH)

Format

Message Format:	BnH 5DH vvH
n:	MIDI Channel Number
vv:	Value (Note1)

Note 1:

The setting value matches the value that is sent and received.

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Chorus Send of Mixer Part 1 through 16.

8.20 NRPN (62H,63H)

Format

Message Format:	BnH 62H vvH (LSB) BnH 63H vvH (MSB)
n:	MIDI Channel Number
vv:	Value

8.20.1 Filter Cutoff

Format

Message Format:	BnH 62H 20H 63H 01H 06H mmH 26H **H
n:	MIDI Channel Number
mm:	Value (Note1)
**:	Ignored

Note 1:

For information about the relationship between setting values and send/receive values, see "25.6 -64 - 0 - 63 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Filter Cutoff of the Tone Parameter.

8.20.2 Filter Resonance

Format

Message Format:	BnH 62H 21H 63H 01H 06H mmH 26H **H
n:	MIDI Channel Number
mm:	Value (Note1)
**:	Ignored

Note 1:

For information about the relationship between setting values and send/receive values, see "25.6 -64 - 0 - 63 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Filter Resonance of the Tone Parameter.

8.21 RPN (64H,65H)**Format**

Message Format:	BnH 64H vvH (LSB) BnH 65H vvH (MSB)
n:	MIDI Channel Number
vv:	Value

8.21.1 Pitch Bend Sensitivity**Format**

Message Format:	BnH 64H 00H 65H 00H 06H mmH 26H **H
n:	MIDI Channel Number
mm:	Value 0~24 (Note1)
**:	Ignored

Note 1:

The setting value matches the value that is sent and received.

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes Pitch Bend Sensitivity.

8.21.2 Fine Tune**Format**

Message Format:	BnH 64H 01H 65H 00H 06H mmH 26H llH
n:	MIDI Channel Number
mm:	Value MSB (Note1)
ll:	Value LSB (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.8 -99 - 0 - 99 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Fine Tune of Mixer Part 1 through 16.

8.21.3 Coarse Tune

Format

Message Format:	BnH 64H 02H 65H 00H 06H mmH 26H 00H
n:	MIDI Channel Number
mm:	Value (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.5 -24 - 0 - 24 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Coarse Tune of Mixer Part 1 through 16.

8.21.4 Modulation Depth

Format

Message Format:	BnH 64H 05H 65H 00H 06H mmH 26H 00H
n:	MIDI Channel Number
mm:	Value (Note1)

Note 1:

The setting value matches the value that is sent and received.

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes Vibrato depth.

8.21.5 Null

Format

Message Format:	BnH 64H 7FH 65H 7F
n:	MIDI Channel Number

Send

This message is not sent when the Instrument is operated.

Receive

Receipt deselects RPN.

8.22 All Sound Off (78H)

Format

Message Format:	BnH 78H 00H
n:	MIDI Channel Number

Send

This message is not sent when the Instrument is operated.

Receive

Receipt stops all voices that are sounding.

8.23 Reset All Controllers (79H)

Format

Message Format:	BnH 79H 00H
n:	MIDI Channel Number

Send

Sent when the song function is used.

Receive

Receipt initializes controller values as shown below.

Message	Number	Controller	Value
Control Change	01H	Modulation	00H
	02H	Breath Controller	00H
	04H	Foot Controller	00H
	0BH	Expression	7FH
	40H	Hold1	00H
	42H	Sostenuto	00H
	43H	Soft	00H
	65H/64H	RPN MSB/LSB	7FH/7FH
	63H/62H	NRPN MSB/LSB	7FH/7FH
Channel Pressure			00H
Pitch Bend Change			40H/00H

9 Mode Message

9.1 All Notes Off (7BH)

Format

Message Format:	BnH 7BH 00H
n:	MIDI Channel Number

9.2 Omni Off (7CH)

Format

Message Format:	BnH 7CH 00H
n:	MIDI Channel Number

9.3 Omni On (7DH)

Format

Message Format:	BnH 7DH 00H
n:	MIDI Channel Number

9.4 Mono (7EH)

Format

Message Format:	BnH 7FH 00H
n:	MIDI Channel Number

9.5 Poly (7FH)

Format

Message Format:	BnH 7FH 00H
n:	MIDI Channel Number

Send

These messages are never sent.

Receive

Receipt of any of these messages releases (same as releasing the keyboard key) the currently sounding voice.

10 Program Change

Format

Message Format:	CnH ppH
n:	MIDI Channel Number
pp:	Program Number

Send

Sent when a tone is selected. See the "Tone List" of the Instrument's User's Guide for details about program numbers.

Receive

Receipt of this message changes the tone of the part that corresponds to the MIDI channel.

The selected tone is determined by the program value of this message and the Bank Select message value received prior to this message. See the "Tone List" in the Instrument's User's Guide for information about actually selecting tones, etc.

Also note that receipt of this message may also change the Part Mode parameter at the same time. For more information, see "10.1 About the Part Mode" below.

10.1 About the Part Mode

Each of the Instrument's parts has a parameter called "Part Mode," which can be set to Piano Mode, Normal Mode, or Drum Mode. The Piano Mode is entered when a piano tone is selected, the Melody Mode is entered when a non-piano tone is selected, and the Drum Mode is entered when rhythm sound used by the drum map is selected.

11 Channel Aftertouch

Format

Message Format:	DnH vvH
n:	MIDI Channel Number
vv:	Value

Send

This message is not sent when the Instrument is operated.

Receive

Receipt of this message adds vibrato to the tone that is sounding. Details of the effect differ according to the tone setting.

12 Pitch Bend

Format

Message Format:	EnH llH mmH
n:	MIDI Channel Number
ll:	Value LSB
mm:	Value MSB

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the pitch of the currently sounding note. The range of the change depends of the Pitch Bend Sensitivity set by RPN.

Part III

System Message

13 Active Sensing

Format

Message Format:	FEH
-----------------	-----

Send

This message is not sent when the Instrument is operated.

Receive

Once this message is received, the Active Sensing mode is entered. If no MIDI message is received for a specified amount of time, voices being sounded by the Instrument's sound source are released, controller is reset, and Active Sensing mode is exited.

14 System Exclusive Message

Format

Message Format:	F0H....F7H
-----------------	------------

This Instrument can send and receive Universal System Exclusive Messages, as well as PX-110/PX-310/PX-700 System Exclusive Messages that have a format that is unique to the Instrument.

14.1 Universal Realtime System Exclusive Message

Format

Message Format:	F0H 7FH....F7H
-----------------	----------------

14.1.1 Master Volume

Format

Message Format:	F0H 7FH 7FH 04H 01H 11H mmH F7H
11:	Value LSB (Note 1)
mm:	Value MSB (Note 1)

Note 1:

The setting value matches the value that is sent and received.

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Master Volume parameter. Note that the Master Volume parameter cannot be changed with an Instrument operation.

14.1.2 Master Balance

Format

Message Format:	F0H 7FH 7FH 04H 02H 11H mmH F7H
11:	Value LSB (Note1)
mm:	Value MSB (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.7 Pan Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Master Pan parameter. Note that the Master Pan parameter cannot be changed with an Instrument operation.

14.1.3 Master Fine Tuning

Format

Message Format:	F0H 7FH 7FH 04H 03H 00H mmH F7H
mm:	Value MSB (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.8 -99 - 0 - 99 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

Sent when Instrument's Fine Tune setting is changed.

Receive

Receipt changes the Master Fine Tune parameter.

Pedal Effect

When a pedal effect used by piano tones is selected, the fine tuning of the strings for which resonance is simulated is also changed in accordance with the Master Fine Tune value. Because of this, receipt of this message may cause the resonance interval to change temporarily.

14.1.4 Master Coarse Tuning

Format

Message Format:	F0H 7FH 7FH 04H 04H 11H mmH F7H
11:	Value LSB (Note1)
mm:	Value MSB (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.5 -24 - 0 - 24 Setting Value Table" in "Part VIII Setting Values and Send/Receive Values".

Send

Sent when Transpose is changed.

Receive

Receipt changes Master Coarse Tune.

14.1.5 Reverb Parameter

Format

Message Format:	F0H 7FH 7FH 04H 05H 01H 01H 01H 01H 01H ppH vvH F7H
pp:	Parameter
vv:	Value

Type Format

Message Format:	F0H 7FH 7FH 04H 05H 01H 01H 01H 01H 01H 00H vvH F7H
vv:	Value (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.10 Reverb Type Setting Value Table" in "Part VIII Setting Values and Send/Receive Values."

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Reverb Type parameter.

Time Format

Message Format:	F0H 7FH 7FH 04H 05H 01H 01H 01H 01H 01H 01H vvH F7H
vv:	Value (Note1)

Note 1:

The setting value matches the value that is sent and received.

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Reverb Time parameter.

14.1.6 Chorus Parameter

Format

Message Format:	F0H 7FH 7FH 04H 05H 01H 01H 01H 01H 02H ppH vvH F7H
pp:	Parameter
vv:	Value

Type Format

Message Format:	F0H 7FH 7FH 04H 05H 01H 01H 01H 01H 02H 00H vvH F7H
vv:	Value (Note1)

Note 1:

For information about the relationship between setting values and send/receive values, see "25.11 Chorus Type Setting Value Table" in "Part VIII Setting Values and Send/Receive Values."

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the System Chorus Type parameter.

Rate Format

Message Format:	F0H 7FH 7FH 04H 05H 01H 01H 01H 01H 02H 01H vvH F7H
vv:	Value (Note1)

Note 1:

The setting value matches the value that is sent and received.

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the System Chorus Rate parameter.

Depth Format

Message Format:	F0H 7FH 7FH 04H 05H 01H 01H 01H 01H 02H 02H vvH F7H
vv:	Value (Note1)

Note 1:

The setting value matches the value that is sent and received.

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Chorus Depth parameter.

Feedback Format

Message Format:	F0H 7FH 7FH 04H 05H 01H 01H 01H 01H 02H 03H vvH F7H
vv:	Value (Note1)

Note 1:

The setting value is the same as the value that is sent.

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Chorus Feedback parameter. The Chorus Feedback parameter cannot be changed with an Instrument operation.

Send To Reverb Format

Message Format:	F0H 7FH 7FH 04H 05H 01H 01H 01H 01H 02H 04H vvH F7H
vv:	Value (Note1)

Note 1:

The setting value is the same as the value that is sent.

Send

This message is not sent when the Instrument is operated.

Receive

Receipt changes the Chorus Send To Reverb parameter. The Chorus Send to Reverb parameter cannot be changed with an Instrument operation.

14.1.7 GM System Message

GM System On Format

Message Format:	F0H 7EH 7FH 09H 01H F7H
-----------------	-------------------------

Send

This message is not sent when the Instrument is operated.

Receive

Receipt puts the sound source into a GM sound source mode.

GM System Off Format

Message Format:	F0H 7EH 7FH 09H 02H F7H
-----------------	-------------------------

Send

This message is not sent when the Instrument is operated.

Receive

Receipt returns the sound source to its normal mode.

GM2 System On Format

Message Format:	F0H 7EH 7FH 09H 03H F7H
-----------------	-------------------------

Send

This message is not sent when the Instrument is operated.

Receive

Though the Instrument does not support GM2, receipt of the GM2 System On message has the same result as receipt of the GM System On message.

14.1.8 GS Message

Message Format:	F0H 41H 10H 42H 12H 40H 00H 7FH 00H 41H F7H
-----------------	---

Send

This message is not sent when the Instrument is operated.

Receive

Receipt performs the same operation as when the GM System On message is received.

14.2 PX-110/PX-310/PX-700 System Exclusive Message

Format

Message Format:	F0H 44H 11H 02H....F7H
-----------------	------------------------

These messages can control most of the Instrument's parameters, as well as user area data send/receive and some commands.

For more information, see "Part IV PX-110/PX-310/PX-700 System Exclusive Message".

Part IV

PX-110/PX-310/PX-700 System Exclusive Message

15 Format

15.1 Message Classifications

Instrument SysEx operations are classified as Parameter type for send and receive of an individual parameter, and parameter set type for bulk send and receive of a set of parameters. These SysEx types can be further broken down into parameter categories according to the item being transferred.

PX-110/PX-310/PX-700 System Exclusive Message			
Individual Parameter Transfer	Command	Status and Commands	
	Patch	Common	MIDI Tune/Mix Sys Chorus Sys Reverb Master EQ (Brilliance) DSP
		Part	Basic Tune/Mix Tone Vibrato
SMF Data Information (PX-310)			
Parameter Set Bulk Dump	SMF Data (PX-310)		

The operation classification of a message is determined in accordance with the value of the "Action" field of the PX-110/PX-310/PX-700 SysEx message. The basic format for all operation type messages is described in "15.2 Message Structure", below.

15.2 Message Structure

The PX-110/PX-310/PX-700 System Exclusive Message Format is formed of the 14 fields shown below. Whether or not a particular field is included in a message and the length of each field depends on the message. Byte is the minimum unit for each field length. If two values are included within the same byte, they are separated by a slash (/).

1	2	3	4	5	6	7	8	9	10	11	12	13
SYSEX	MAN	MOD	dev	act	cat	prm	ilen/dlen	ps	index	data	sum	EOX

The "act" field describes the action that the message performs. The meanings of the "index" and "data" fields differ according to the content of the act field. The following describes each of the fields in detail.

15.2.1 1...SYSEX : System Exclusive message Status

Format:	11110000B
---------	-----------

System Exclusive message Status = F0H

15.2.2 2...MAN : Manufacturer's ID

Format:	01000100B
---------	-----------

CASIO Manufacturer's ID = 44H

15.2.3 3...MOD : Model ID

Format:	00010001B (MSB)	00000011B (LSB)
---------	-----------------	-----------------

The Model ID of the Instrument is shown by two consecutive bytes (MSB, LSB).
(PX-110/PX-310/PX-700 Model ID MSB = 11H, LSB = 03H)

15.2.4 4...dev : MIDI Device ID 00H to 1FH,7FH

Format:	0dddddddB
---------	-----------

The contents of this field in a received message are compared with the Model's MIDI Device ID, and receipt of the incoming message is allowed only when the two IDs match. The default value for this field is 10H. When a message containing 7FH is received, receipt of the message is always allowed, regardless of the Instrument's ID setting.

MIDI Device ID is a Patch Parameter, and it can be changed with a System Exclusive Message. In this case, the Device ID of the MIDI System Exclusive Message must be set to 7FH before it is sent.

15.2.5 5...act : Action

Format:	00000aaaB
---------	-----------

aaaB = Action (3bit)

This field indicates the operation of the System Exclusive Message.

aaaB	Message Type
00H	IPC Individual Parameter Change
01H	IPR Individual Parameter Request
02H	BDS Oneway Parameter Set Bulk Send
03H	BDR Oneway Parameter Set Bulk Request
04H	HDS Handshake Parameter Set Bulk Send
05H	HDR Handshake Parameter Set Bulk Request
06H	Reserved
07H	Communication Control for Handshake (EOD, HDA, HDJ, HDE, BSY, EOS, NOP)

15.2.6 6...cat : Category

Format: 0000ccccB

0ccccccB = Category (7bit)

The category indicates the type of data handled by the System Exclusive Message. The ID number (ID) of the Category is indicated on the left, while the communication operation (Action) is indicated on the right.

Category		Action (act)						
ID (c)	Parameter Set	IPC	IPR	BDS	BDR	HDS	HDR	Control
00H	Command	A	R	-	-	-	-	-
01H	Patch	A	R	-	-	-	-	-
02H	Tone	A	R	-	-	A	R	A
03H	Reserved	-	-	-	-	-	-	-
04H	Reserved	-	-	-	-	-	-	-
05H	Reserved	-	-	-	-	-	-	-
06H	Reserved	-	-	-	-	-	-	-
07H	Reserved	-	-	-	-	-	-	-
08H	Reserved	-	-	-	-	-	-	-
09H	Reserved	-	-	-	-	-	-	-
0AH	Reserved	-	-	-	-	-	-	-
0BH	Reserved	-	-	-	-	-	-	-
0CH	Reserved	-	-	-	-	-	-	-
0DH	Reserved	-	-	-	-	-	-	-
0EH	Reserved	-	-	-	-	-	-	-
0FH	Reserved	-	-	-	-	-	-	-
10H	SMF(PX-310)	T	R	-	-	A	R	A
11H	Reserved	-	-	-	-	-	-	-
12H	Reserved	-	-	-	-	-	-	-

A: Available (Also including when only some parameters are available.)

R: Receive Only

T: Transmit Only

-: Not Available

Note1... Depends on currently tone operation.

15.2.7 7...prm : Parameter ID

Format: 0pppppppB

The Parameter ID field indicates the parameter type. When transferring parameters (see "Part V Parameter List" below) individually (as opposed to bulk transfer), this field is used to identify the parameter being transferred by its parameter ID. Any other time, this field is filled with the value 00H.

15.2.8 8...ilen/dlen : index length / data length

Format: 0iiddffffB

This field indicates the size of the "11...index" field and the "12...data" field.

iiB (Binary) = index length

"index length (iiB)" indicates the index field length, which is always the following, regardless of the "act" (Action) value.

iiB.....index byte size - 1

"act" Value	Message Type	iiB
00, 01	IPC, IPR	index byte size - 1 (Example: When 4 bytes = 3)
02, 04	BDS, HDS	2 = 10B (Packet Number = 3 bytes)
03, 05	BDR, HDR	0 = 00B (This field is empty, but its length is indicated as 0.)
07	Control	0 = 00B (The length of this filed is 1 byte.)

dddddB (Binary) = data length

"data length (dddB)" indicates the size of each data unit (parameter) in the "data" field.

The data length differs according to Message Type, as shown below.

"act" Value	Message Type	dddB
00	IPC	data bit size - 1 (If 1 bit = 00000B; if 32 bits = 11111B)
02, 04	BDS, HDS	data bit size - 1 = 01111B (Transfer is in 16-bit units, so)
01, 03, 05, 07	IPR, BDR, HDR or Control	0

15.2.9 9....ps : Parameter Set Number

Format:	0nnnnnnnB (LSB)	0mmmmmmmmB (MSB)
---------	-----------------	------------------

This field is a 2-byte (LSB, MSB) value indicating the number of the parameter set (00mmmmmmmmnnnnnnnB, binary) being transferred.

15.2.10 10....index Parameter Index Number

When act = 00(IPC) or 01(IPR)

Format:	OiiiiiiiB	(0jjjjjjjB)	(0kkkkkkkB)	(0lllllllB)
---------	-----------	-------------	-------------	-------------

This field contains a supplementary number that points to data when parameters are arrayed. The meaning is different for each parameter, and the length can be anywhere from one to four bytes.

Even when parameters have the same IDs, for example, as when the parameters also have preset numbers, part numbers, and key numbers, parameters can be distinguished by specifying these values with an "index".

When act = 02(BDS) or 04(HDS)

Format:	0nnnnnnnB	0NNNNNNNNB	0LLLLLLLBB
---------	-----------	------------	------------

In this case, "index" is a 3-byte fixed field. When transferring one parameter set, it indicates the divided packet serial number (starting with 00) and the size of the "data" field that immediately follows this field.

i[0]...0nnnnnnnB	Packet Number LSB (NNNNNNNnnnnnnnB = Packet Number)
i[1]...0NNNNNNNNB	Packet Number MSB

As explained in the data field section, 128 bytes can be sent per packet, so received data can be stored at [Parameter Set start address] + [Packet Number] × 128.

i[2]...0LLLLLLLB	data length / 3
------------------	-----------------

The data length is the data length indicated here, multiplied by 3. This means that the data length is always a multiple of 3.

When *act* = 03(BDR) or 05(HDR)

Format:	-
---------	---

This field is always empty.

When *act* = 7 (EOD, HDA, HDJ, HDE, BSY, EOS, NOP)

Format:	0000ccccB
---------	-----------

In this case, the "index" field length is fixed at 1 byte, and it indicates the control messages used for handshaking as shown below. See "17 Parameter Set Transfer Modes" for more information.

ccccB Control Message	
0000B	EOD Oneway/Handshake Bulk Dump End of Data (End of Parameter Set Transfer)
0001B	HDA Handshake Bulk Dump Acknowledge (Handshake Receive Successful)
0010B	HDJ Handshake Bulk Dump Reject (Handshake Rejected/Stopped)
0011B	HDE Handshake Bulk Dump Error (Handshake Error)
0100B	BSY Handshake Bulk Dump Busy (Handshake Busy)
0101B	EOSOneway/HandshakeBulkDumpEndofPackage (EndofParameterSetPackageTransfer)
:	
1111B	NOP No Operation (No Operation)

15.2.11 11...data Parameter Data

When *act* = 1(IPR), 03(BDR), 05(HDR) or 7 (EOD, HDA, HDJ, HDE, BSY, EOS, NOP)

Format:	-
---------	---

This field is always empty.

When *act* = 00(IPC)

Format:	0dddddddB	(0eeeeeeeB)	(0fffffffB)	(0gggggggB)	(0hhhhhhhB)
---------	-----------	-------------	-------------	-------------	-------------

Indicates the value of the parameter itself. The length varies in accordance with the data size indicated by the "dlen" field, as shown below. This field is not included for a parameter request.

dddddB + 1	Number of Data
1 - 7	1
8 - 14	2
15 - 21	3
22 - 28	4
29 - 32	5

Each block of data is packed from the lowest order byte first. In the case of multiple-byte data, the lowest weighted bit is the LSB of the first "data" block, and the highest weighted bit is the MSB of the final "data" block.

The following shows an example of how data would be divided for transfer in the case of 32-bit data.

	7	6	5	4	3	2	1	0
data0:	0	[bit06]	[bit05]	[bit04]	[bit03]	[bit02]	[bit01]	[bit00]
data1:	0	[bit13]	[bit12]	[bit11]	[bit10]	[bit09]	[bit08]	[bit07]
data2:	0	[bit20]	[bit19]	[bit18]	[bit17]	[bit16]	[bit15]	[bit14]
data3:	0	[bit27]	[bit26]	[bit25]	[bit24]	[bit23]	[bit22]	[bit21]
data4:	0	0	0	0	[bit31]	[bit30]	[bit29]	[bit28]

When act = 02(BDS) or 04(HDS)

Format:	0dddddBB	0cccccccB	000000abB
---------	----------	-----------	-----------

For a bulk data transfer operation, the parameter set data to be transferred is read sequentially in 16-bit units starting from the top address. Read values are divided into 3-byte segments as shown below, and then sent in sequence.

The following is the conversion format, which is the same as the individual parameter 16-bit transfer detailed above.

16-bit Memory Image

MSB: abccccccB

LSB: cdddddddB

↓

data0: 0dddddBB

data1: 0cccccccB

data2: 000000abB

Note, however, that a parameter set of 128 bytes or less can be sent using a single packet, and anything greater than 128 bytes is divided among multiple packets.

This means that the maximum length "data" field is $128/2 \times 3 = 192$ bytes.

Only one parameter set can be transferred per session, and data from different parameter sets cannot be mixed within a single packet, even when sending multiple parameter sets. Different parameter sets are always divided into separate packets.

15.2.12 12...sum Check Sum

When *act* = 00(IPC), 01(IPR), 03(BDR), 05(HDR) or 7(EOD, HDA, HDJ, HDE, BSY, EOS, NOP)

Format:	-
---------	---

This field is always empty.

When *act* = 02(BDS) or 04(HDS)

Format:	0sssssssB
---------	-----------

In this case, the "sum" field contains a value, which, when added to the total value of the "data" field, makes the lower seven bits 0.

The receiving side checks if this is true, and performs error handling (re-request, etc.) if it is not.

15.2.13 14...EOX : End of System Exclusive Message

Format:	11110111B
---------	-----------

(End of System Exclusive message Status = F7H)

16 Parameter Unit Operations

There are two parameter unit operations: Individual Parameter Transfer and Individual Parameter Request.

For one session, in response to an IPR (Individual Parameter Request) from an external device, this Instrument returns an IPC (Individual Parameter Change) or the session is concluded when the external device or this Instrument spontaneously sends an IPC. If this Instrument received an IPC, the value of the applicable parameter is changed.

An Individual Parameter Change can also be used to issue some command to the Instrument, and the Individual Parameter Request can be used to check Instrument status information.

Data Receiver	Data Sender	Operation
IPR →		Send Request (Optional)
←	IPC	Data Transfer

See "Part V Parameter List" for information about how parameters can actually be sent.

17 Parameter Set Transfer Modes (PX-310)

17.1 Communication Modes

17.1.1 One-way and Handshake

Parameter Sets can be transferred by bulk dump using the message exchange types described below.

- One-way mode Parameter Set send/receive (not used)
- One-way mode Parameter Set send request send/receive (not used)
- Handshake mode Parameter Set send/receive
- Handshake mode Parameter Set send request, receive rejected, error notification send/receive

With the one-way mode, the sending device sends data and ends the session without regard to the response of the receiving device. This mode is best for one-way transfers from a sequencer or similar device.

Important!

The one-way mode format is defined for possible future use, but it is not used because there is no Parameter Set category that corresponds to this Instrument.

With the handshake mode, the sending device sends the data and then waits for a response from the receiving device before advancing to the next session. This is a high-speed mode in which there is no time wasted waiting.

See "VI Parameter Set List" for information about how Parameter Sets are actually allocated.

In order to ensure maximum speed for bulk dumping of Parameter Sets, the data format is different from the data format used for Individual Parameter Change. Data is transferred as-is, using the Model's memory image.

17.1.2 Session and Subsession

Subsession

One Parameter Set can be transferred per subsession. Subsession transfers one Parameter Set or data that is broken down into multiple packets for transfer, with EOD (End of data) sent at the end to terminate the send.

Data is broken down into multiple packets when a single Parameter Set is larger than a certain size. The Packet Number in the packet's index field is used to indicate the sequential position of a packet relative to the other packets.

Even if Parameter Sets are small, they cannot be grouped together and sent as a single packet. A Parameter Set delimiter is always treated as a packet delimiter for transfer.

Session

One Parameter Set or multiple Parameter Sets can be transferred by one session. A session can consist of one subsession or multiple subsessions, with EOS (End of session) sent at the end to terminate the send.

Regardless of whether there is a single Parameter Set or multiple Parameter sets, an actual bulk dump always takes the form of a session, never a subsession only.

17.2 One-way Mode Communication Flow

A session starts with the receiving device sending a request using a BDR, or with the sending device sending BDS data. The session ends after transfer of all the data in the parameter set being transferred by the sending device is complete.

Data is divided into multiple packets of 256 bytes or less each, and transfers them at fixed intervals (20 msec). A final EOD informs the receiving device when the session is ended.

Data Receiver (External Device)	Data Sender (This Instrument)	Operation
	BDR →	Send Request (Optional)
	← BDS	Data Transfer
	(20 msec or greater interval)	
	← BDS	Data Transfer
	(20 msec or greater interval)	
	← BDS	Data Transfer
	(20 msec or greater interval)	
	:	
	:	
	← EOD	End Of Data
	:	
Other subsessions		
	:	
	← EOS	End of session

17.3 Handshake Mode Communication Flow

A session starts with the receiving device sending a request using a HDR or with the sending device sending HDS data.

The sending device does not send the next packet until it receives an ACK from the receiving device. The maximum wait time of at least 2000 msec is reserved. Failure of a response to arrive within the wait time (at least 2000 msec) is treated as a timeout error, and data communication is terminated.

The sending device resends the last data if the receiving device returns an HDE (error) due to checksum mismatch, incompatible data structure, or some other reason. If an error repeats a number of times (undefined), either the sending device or the receiving device sends an HDJ to terminate the session.

A session ends after the sending device sends all the parameter sets, and sends a final EOD in response to an HDA (ACK) from the sending device.

Data Receiver	Data Sender	Operation
HDR →		Send Request (Optional)
← HDS		Data Send
HDA →		Acknowledge
← HDS		Data Send
HDA →		Acknowledge
:		
:		
HDA →		Acknowledge
← EOD		End Of Data
:		
Other subsessions		
:		
← EOS		End of session

The same packet is resent when a checksum mismatch or incompatible data structure error is detected.

Data Receiver	Data Sender	Operation
HDR →		Send Request (Optional)
← HDS		Data Send
HDA →		Acknowledge
← HDS		Data Send
HDE →		Error
← HDS		Data Re-send
:		
:		
HDE →		Error
← EOD		End Of Data
:		
Other subsessions		
:		
← EOS		End of session

Data send is canceled when no acknowledgement (ACK) is not received.

Data Receiver	Data Sender	Operation
HDR →		Send Request (Optional)
← HDS		Data Send
HDA →		Acknowledge
← HDS		Data Send
HDJ →		Rejection
	(Send Canceled)	

The session can be canceled for any reason by sending an HDJ. The HDJ can be sent by the sending device or the receiving device. The bulk dump session is terminated immediately upon receipt of an HDJ.

Data Receiver	Data Sender	Operation
HDR →		Send Request (Optional)
← HDS		Data Send
HDA →		Acknowledge
← HDS		Data Send
:		
:		
HDJ →		Data Receive Rejected (Send Canceled)

Data Receiver	Data Sender	Operation
HDR →		Send Request (Optional)
HDA →		Acknowledge
← HDS		Data Send
HDA →		Acknowledge
← HDS		Data Send
:		
:		
← HDJ		Data Send Rejected (Send Canceled)

When the BSY is received, the receiver must wait until the PX-310 enters a session-enabled mode, or use a Prepare for Data Management parameter (see "18.2 Data Management Command List") to change to a communication-enabled mode.

Data Receiver	Data Sender	Operation
BDR →		Send Request
← BSY		Busy
		(Send Canceled)

Data Receiver	Data Sender	Operation
BDS →		Data Send
← BSY		Busy
		(Send Canceled)

Data Receiver	Data Sender	Operation
HDR →		Send Request
← BSY		Busy
		(Send Canceled)

Data Receiver	Data Sender	Operation
HDS →		Data Send
← BSY		Busy
		(Send Canceled)

See "Part VI Parameter Set List" for information about how parameter sets can actually be transferred.

Part V

Parameter List

These lists show the parameters that can be transferred individually using System Exclusive Messages.

- Note 1: Any parameter that has "r" to the right of its Parameter ID number is a read-only parameter that can be used for obtaining status information only.
A parameter with "w" next to its Parameter ID is a write-only parameter, which is used for commands, etc.
- Note 2: Except for the "Setting Value" column, all values in the System Exclusive Format table and the Parameter Lists are hexadecimal, unless specifically noted otherwise.
- Note 3: Receipt of a value outside a specified range causes the value marked "Default" to be used instead.

18 Command Parameter

The parameters defined here mainly execute commands and indicates statuses. Values indicate the pointer to a command or a status.

18.1 System Parameter List

System Exclusive Format

Field	Value
01	SYSEX
02	MAN
03	MOD
04	<i>dev</i>
05	<i>act</i>
06	<i>cat</i>
07	<i>prm</i>
08	<i>ilen/dlen</i>
09	<i>ps</i>
10	<i>index</i>
11	<i>data</i>
12	<i>sum</i>
13	EOX

System Parameter List

ParamID	Parameter	ps	index	bit	Value	Default	Setting	Value (Decimal)
00r	Model Version ID (Note1)	0000	00	0E	Depends on model.	0	nn00 = reserved nn01 = PX-110 nn02 = PX-310 nn03 = PX-700 nn is version (00 to 3F)	
03	DSP Bypass (Note2)	0000	00	10	0~FFFF	0	Bit0...Part1 Bit1....Part2 : Bit15...Part16 0...Nop 1...DSP cancel	
07	Parameter Backup Mode	0000	00	01	0-1	0	0...partial 1...all	

Note 1:

This is the version number of models with the same System Exclusive Model ID = 11-03. This value is used to distinguish the model for a parameter send request from an external source.

Note 2:

This is a request to look up and cancel the tone status of parts whose bits are set. It does this by canceling the DSP Line selection of the parts whose corresponding bit is 1.

18.2 Data Management Command Parameter List

System Exclusive Format

Field	Value
01	SYSEX
02	F0
02	MAN
03	44
03	MOD
04	11,02
04	dev
04	00 to 1F, or 7F
05	act
05	00(IPC), 01(IPR)
06	cat
06	Command = 0
07	cat
07	00-7F
08	prm
08	ilen/dlen
08	0 / bit size - 1
09	ps
09	0
10	index
10	0
11	data
11	See the Parameter List.
12	sum
12	None
13	EOX
13	F7

Data Management Command List

ParamID	Parameter	ps	index	bit	Value	Default	Setting Value (Decimal)
20w	Prepare for Data Management (Note1)	0	00	07	0~127	0	0...Prepare
22r	Free Size of SMF (Note2)	0	00	20	0~FFFFFF	0	Free size (bytes)
27w	Delete SMF	0	0	10	0~FFFF	0	SMF Number

Note 1:

Receipt of this parameter causes the PX-310 to terminate all music and note play, and enter a mode that is optimized for bulk dump.

Note 2:

This parameter reserves SMF area memory space. Unit is bytes.

18.3 Command Parameter List

System Exclusive Format

Field	Value
01	SYSEX
02	F0
02	MAN
03	44
03	MOD
04	11,02
04	dev
04	00 to 1F, or 7F
05	act
05	00(IPC), 01(IPR)
06	cat
06	Command = 0
07	prm
07	00~7F
08	ilen/dlen
08	0 / bit size - 1
09	ps
09	LSB,MSB = 00,00
10	index
10	Part
11	data
11	See the Parameter List.
12	sum
12	None
13	EOX
13	F7

Setup Parameter List

ParamID	Parameter	ps	index	bit	Value	Default	Setting	Value (Decimal)
2C	Split	0000	00	01	0~1	0	0...Off	
							1...On	
2D	Split Point	0000	00	07	0~7f	40	0~127	
							1...On	
2E	Layer	0000	00	01	0~1	0	0...Off	
							1...On	
2F	Layer Balance	0000	00	07	00~40~7F	40	-64~0~+63	
30	Touch Response	0000	00	02	0~3	1	0...Off	
							1...Light	
							2...Normal	
							3...Heavy	
31	Transpose	0000	00	07	28~40~58	40	-24~0~+24	
32	Assignable Pedal Mode	0000	00	02	0~3	0	0...Soft	
							1...Sostenuto	
							2...reserved	
							3...reserved	
33	Damper Middle Depth	0000	00	07	0~127	40	0~127	
34	Mixer Hold	0000	00	01	0~1	0	0...Off	
							1...On	
35	Music Count	0000	00	01	0~1	0	0...Off	
							1...On	
36	Metronome (PX-110/PX-700)	0000	00	01	0~1	0	0...Off	
							1...On	
37	Metronome Beat (PX-110/PX-700)	0000	00	04	0~5	3	0...No Accent	
							1...2	
							2...3	
							3...4	
							4...5	
							5...6	
38	Accomp Mode (PX-110/PX-310)	0000	00	02	0~3	0	0...NORMAL	
							1...CASIO CHORD	
							2...FINGERED	
							3...FULL RANGE	

MIDI Parameter List

ParamID	Parameter	ps	index	bit	Value	Default	Setting	Value (Decimal)
39	Keyboard MIDI Channel	0000	00	04	00~0F	0	1~16Channel	
3A	MIDI Chord judge (PX-110/PX-310)	0000	00	01	0~1	0	0...Off	
							1...On	
3B	Accomp/Song Memory MIDI Out (PX-110/PX-310)	0000	00	01	0~1	0	0...Off	
							1...On	
3C	Local Control	0000	00	01	0~1	0	0...Off	
							1...On	

19 Patch Parameter

The patch parameter is a temporary area that controls the sound source operation mode.

The registration function copies part of the parameters in this area to registration memory, and loads parameters stored in registration memory to this temporary memory.

19.1 Patch Common Parameter List

This list shows setting parameters that are common for each part.
System Exclusive Format

System Exclusive Format

Field	Value
01	SYSEX
02	MAN
03	MOD
04	<i>dev</i>
05	<i>act</i>
06	<i>cat</i>
07	<i>prm</i>
08	<i>ilen/dlen</i>
09	<i>ps</i>
10	<i>index</i>
11	<i>data</i>
12	<i>sum</i>
13	EOX

MIDI Parameter List

ParamID	Parameter	bit	Value	Default	SettingValue (Decimal)
00	MIDI Device ID (Note 1)	07	00-1F	10	0-31
01	MIDI Global Channel	04	00-0F	00	1-16

Note 1:

This parameter sets the SysEx Device ID.

Tune / Mix Parameter

ParamID	Parameter	bit	Value	Default	SettingValue (Decimal)
04	Master Fine Tune (Note1)	08	00~FF	80	-100~0~99cent
05	Master Coarse Tune (Note2)	07	28~58	40	-24~0~24semi
08	Master Volume	07	00~7F	7F	0~127
09	Master Pan (Note3)	07	00~7F	40	-64~0~+64
0A	Chorus Send To Reverb (Note4)	07	00~7F	00	0~127
0B	DSP Line Bypass (Note5)	01	0~1	0	0...Effect 1...DSP Bypass

Note 1:

See "25.8 -99 - 0 - 99 Setting Value Table".

Note 2:

See "25.5 -24 - 0 - 24 Setting Value Table".

Note 3:

See "25.7 Pan Setting Value Table".

Note 4:

This specifies the volume of data sent from System Chorus to System Reverb.

Note 5:

When "Bypass" is specified for "DSP Line Bypass," the DSP Line Select settings of all parts are disabled, and all DSP lines are treated as if they are turned off. This means that notes that are currently sounding are not affected.

System Chorus

ParamID	Parameter	bit	Value	Default	SettingValue (Decimal)
10	Chorus Macro Num (Note 1)	05	00-0F	02	0-15
11	Chorus Level	07	00-7F	40	0-127
12	Chorus Rate	07	00-7F	03	0-127
13	Chorus Depth	07	00-7F	13	0-127
14	Chorus Feedback (Note 2)	07	00-7F	00	0-127
15	Chorus Tone (Note 3)	07	00-7F	7F	0-127

Note 1:

Selects the System Chorus preset type. Receipt of GM/GS Reset selects Chorus3. The other Master Equalizer parameters are changed to preset values in accordance with this type value. See "25.11 Chorus Type Setting Value Table."

Note 2:

Sets the System Chorus feedback volume.

Note 3:

Adjusts the System Chorus timbre.

System Reverb

ParamID	Parameter	bit	Value	Default	SettingValue (Decimal)
18	Reverb Macro Num (Note 1)	05	00-0F	04	0-15
19	Reverb Level	07	00-7F	40	0-127
1A	Reverb Time/Del Feedback	07	00-7F	40	0-127
1B	Reverb ER Level	07	00-7F	40	0-127
1C	Reverb Hi Damp	07	00-7F	40	0-127
1D	Reverb Tone	07	00-7F	7F	0-127

Note 1:

Selects the System Reverb preset type. Receipt of GM/GS Reset selects Hall2. The other Master Equalizer parameters are changed to preset values in accordance with this type value. See "25.10 Reverb Type Setting Value Table."

Master Equalizer (Brilliance)

ParamID	Parameter	bit	Value	Default	SettingValue (Decimal)
21	MasEq Low Freq (Note1)	07	00~7F	40	0~2
22	MasEq Low Gain (Note2)	07	00~40~7F	40	-12~0~+12
23	MasEq Mid-Low Freq (Note3)	07	00~7F	40	0~7
24	MasEq Mid-Low Gain (Note4)	07	00~40~7F	40	-12~0~+12
25	reserved	-	-	-	-
26	MasEq Brilliance Gain (Note5)	07	00~40~7F	40	-12~0~+12
27	MasEq High Freq (Note6)	07	00~7F	40	0~9
28	MasEq High Gain (Note7)	07	00~40~7F	40	-12~0~+12

Note 1:

Selects the Master EQ low-range cutoff frequency. See "25.12 Equalizer Low Frequency Setting Value Table".

Note 2:

Selects the Master EQ low-range gain. See "25.15 Equalizer Gain Setting Value Table".

Note 3:

Selects the Master EQ mid frequency. See "25.13 Equalizer Mid Frequency Setting Value Table".

Note 4:

Selects the Master EQ mid-range gain. See "25.15 Equalizer Gain Setting Value Table".

Note 5:

Selects the Master EQ Brilliance (mid-high range) gain. See "25.15 Equalizer Gain Setting Value Table".

Note 6:

Selects the Master EQ high-range cutoff frequency. See "25.14 Equalizer Hi Frequency Setting Value Table".

Note 7:

Selects the Master EQ high-range gain. See "25.15 Equalizer Gain Setting Value Table".

DSP Patch Parameter

Values are also stored to block when the DSP Type or Tone is changed.

ParamID	Parameter	bit	Value	Default	SettingValue (Decimal)
2C	DSP Type Number (Note1)	08	00~C8	0E	0~99 Preset 200 DSP of Tone
2D	DSP Hold	01	0~1	0	0...Off 1...On
2E	DSP Level	07	00~7F	64	0~127
2F	DSP Pan (Note2)	07	00~7F	40	-64~0~63

Note 1:

Selects the DSP Type. Receipt of GM/GS Reset selects 014 Delay. 200 is stored when a tone-associated DSP is read into the DSP area. For the effect details for each type, see "25.18 DSP Preset List".

Note 2:

See "25.7 Pan Setting Value Table".

DSP Type parameter

The value of this block's parameter is rewritten whenever the DSP Type or Tone is changed.

ParamID	Parameter	bit	Value	Default	Setting Value (Decimal)
30	DSP Name A (Note1)	20	0~FFFFFF	556e7469	MSB is leading character.
31	DSP Name B (Note1)	20	0~FFFFFF	746c6564	MSB is leading character.
32r	DSP Algorithm ID (Note2)	07	00~3F	00	0~63
33	DSP Chorus Send	07	00~7F	40	0~127
34	DSP Reverb Send	07	00~7F	40	0~127

Note 1:

These parameters change the DSP name. One character is indicated by each byte.

Note 2:

This value is the DSP algorithm ID, which cannot be changed directly at the user level. Changing the DSP Type or Tone Number causes the algorithm ID of the original DSP to be copied automatically to this area. See "25.16 DSP Algorithm ID Table".

DSP Type Independent Parameters

The eight DSP user parameters listed below can be set by the control change messages, while the following 16 internal parameters that can be set by system exclusive messages only. The range of these parameter values is 0 to 127, regardless of the DSP algorithm. However, the number of parameter types depends on the DSP algorithm, which means that not all User Parameters and Internal Parameters are necessarily available as a particular DSP's parameters.

See the "Part VII DSP Parameter List" for details about parameter types and contents.

ParamID	Parameter	bit	Value	Default	SettingValue (Decimal)
38	DSP User Parameter0	07	00-7F	-	0-127
39	DSP User Parameter1	07	00-7F	-	0-127
3A	DSP User Parameter2	07	00-7F	-	0-127
3B	DSP User Parameter3	07	00-7F	-	0-127
3C	DSP User Parameter4	07	00-7F	-	0-127
3D	DSP User Parameter5	07	00-7F	-	0-127
3E	DSP User Parameter6	07	00-7F	-	0-127
3F	DSP User Parameter7	07	00-7F	-	0-127
40	DSP Internal Param00	07	00-7F	-	0-127
41	DSP Internal Param01	07	00-7F	-	0-127
42	DSP Internal Param02	07	00-7F	-	0-127
43	DSP Internal Param03	07	00-7F	-	0-127
44	DSP Internal Param04	07	00-7F	-	0-127
45	DSP Internal Param05	07	00-7F	-	0-127
46	DSP Internal Param06	07	00-7F	-	0-127
47	DSP Internal Param07	07	00-7F	-	0-127
48	DSP Internal Param08	07	00-7F	-	0-127
49	DSP Internal Param09	07	00-7F	-	0-127
4A	DSP Internal Param10	07	00-7F	-	0-127
4B	DSP Internal Param11	07	00-7F	-	0-127
4C	DSP Internal Param12	07	00-7F	-	0-127
4D	DSP Internal Param13	07	00-7F	-	0-127
4E	DSP Internal Param14	07	00-7F	-	0-127
4F	DSP Internal Param15	07	00-7F	-	0-127

19.2 Patch Part Parameter List

This list shows setting parameters that are specific for each part.

System Exclusive Format

Field	Value
01	SYSEX F0
02	MAN 44
03	MOD 11,02
04	<i>dev</i> 00 to 1F, or 7F
05	<i>act</i> 00(IPC), 01(IPR)
06	<i>cat</i> Patch = 01
07	<i>prm</i> 00-7F
08	<i>ilen/dlen</i> 0 / bit size - 1
09	<i>ps</i> LSB,MSB = 00, 00
10	<i>index</i> Part Number - 1 (00-1F)
11	<i>data</i> See the Parameter List.
12	<i>sum</i> None
13	EOX F7

Basic Parameter List

ParamID	Parameter	bit	Value	Default	SettingValue (Decimal)
50	Tone Number (Note1)	0E		000	000~FFF
51	Part Octave Shift	03	2~6	4	-2~0~2 Oct
52	Part Enable	01	0~1	1	0...Disable (Off) 1...Enable (On)
53	Part Mode (Note2)	04	0~4	0	0...Normal 1...Rhythm 2...Reserved 3...Reserved 4...Reserved 5...Piano

Note 1:

Number of the tone allocated to this part.

Note 2:

Sets the melody and rhythm modes of the part play operation. For detailed operations, see "10.1 About the Part Mode".

Tune / Mix parameter

ParamID	Parameter	bit	Value	Default	SettingValue (Decimal)
54	Pitch Fine Tune	08	00~FF	80	-99~0~99cent
55	Pitch Coarse Tune	07	28~58	40	-24~0~24 semi
56	Volume	07	00~7F	7F	0~127
57	Accomp Volume (PX-110/PX-310)	07	00~7F	7F	0~127
58	Bend Range	07	00~18	02	0~+24
59	Pan	07	00~7F	40	-64~0~63

Tone parameter

ParamID	Parameter	bit	Value	Default	Setting	Value (Decimal)
60	Tone Name A (Note1)	20	0~FFFFFFF	556e7469	MSB is leading character.	
61	Tone Name B (Note1)	20	0~FFFFFFF	746c6564	MSB is leading character.	
64	Line Select	01	0~1	0	0...Thru 1...DSP	
65	Tone Octave Shift	03	2~6	4	-2~0~+2	Oct
66	Tone Attack Time	07	00~7F	40	-64~0~+63	
67	Tone Release Time	07	00~7F	40	-64~0~+63	
68	Tone DCF Cutoff	07	00~7F	40	-64~0~+63	
69	Tone DCF Resonance	07	00~7F	40	-64~0~+63	
6A	Chorus Send	07	00~7F	00	0~127	
6B	Reverb Send	07	00~7F	32	0~127	
6C	Tone Level	07	00~7F	7F	0~127	
6D	Tone Touch Sens	07	00~7F	7F	-64~0~+63	

Note 1:

Change the tone name. One character is indicated by each byte.

Vibrato Parameter

ParamID	Parameter	bit	Value	Default	Setting	Value (Decimal)
7A	Vibrato Type	04	0~3	0	Vibrato Waveform 0....Triangle 1....Saw Up 2....Pulse 3....Sin	
7B	Vibrato Delay	07	00~7F	40	-64~0~64	
7C	Vibrato Rate	07	00~7F	40	-64~0~64	
7D	Vibrato Pitch Depth	07	00~7F	40	-64~0~64	
7E	Vibrato Modulation Sens (Note1)	07	00~7F	00	0~127	
7F	Vibrato Aftertouch Sens (Note2)	07	00~7F	00	0~127	

Note 1:

This parameter adjusts the depth of the Vibrato effect when Modulation MIDI Control Change is received.

Note 2:

This parameter adjusts the depth of the Vibrato effect when MIDI Channel Aftertouch is received.

20 SMF Data Parameter (PX-310)

SMF Data Parameters contain address, size, and name information about SMF data.

20.1 SMF Data Information

System Exclusive Format

Field	Value
01	SYSEX
02	MAN
03	MOD
04	<i>dev</i>
05	<i>act</i>
06	<i>cat</i>
07	<i>prm</i>
08	<i>ilen/dlen</i>
09	<i>ps</i> LSB,MSB = SMF Data number For details, see "21 About Parameter Set (PS) numbers".
10	<i>index</i>
11	<i>data</i>
12	<i>sum</i>
13	EOX

Parameter List

ParamID	Parameter	bit	Value	Default	Setting Value (Hexadecimal)
00	Data Existence	01	0~1	0	0...No data 1...Data present
01	Data Address Hi	0F	00~7FFF	00	
02	Data Address Lo	10	0~FFFF	0000	
03	Data Size	20	0~FFFFFFFF	00000000	
04	Name A	20	0~FFFFFFF 20202020 MSB is leading character.		
05	Name B	20	0~FFFFFFF 20202020 MSB is leading character.		
06	Name C	20	0~FFFFFFF 20202020 MSB is leading character.		

Part VI

Parameter Set List

This list shows the parameter sets that can be transferred using System Exclusive Message Bulk Dump.


21 SMF Parameter Set (PX-310)

System Exclusive Format

Field	Value
01	SYSEX
02	MAN
03	MOD
04	<i>dev</i>
05	<i>act</i>
06	<i>cat</i>
07	<i>prm</i>
08	<i>ilen/dlen</i>
09	<i>ps</i>
10	<i>index</i>
11	<i>data</i>
12	<i>sum</i>
13	EOX

Data Format

Bulk dumping SMF data transfers the data with a 128-byte header appended as shown below. The header data starts with an 8-byte file name, which is displayed by the Instrument after receipt.

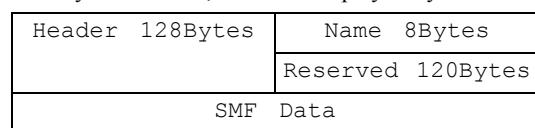

22 About Parameter Set (PS) numbers

When using a system exclusive message to transfer a user Parameter Sets or user Parameter Set parameters, the specified Parameter Set number do not necessarily need to start from zero when the Parameter Set numbers are located after the preset Parameter Set. Refer to the table below for user area Parameter Set number for each category.

PS Category	User PS Header (Decimal)	Number of User PS (Decimal)
SMF	0	10

Part VII

DSP Parameter List

This list shows the parameters for each of the DSP algorithms.
U0 to U7 indicate User Parameters 0 to 7, while I00 to I15 indicate Internal Parameters 00 to 15.
Parameters for which no setting range is indicated, receipt of a value from 0 to 127 is assigned as-is to the parameter.

23 DSP Algorithm List (Single Effect)

These are effects that are configured of a single module.

23.1 Algorithm 00 (00H) : Auto Pan

Number	Parameter	Notes
U0	Rate	-
U1	Depth	-

23.2 Algorithm 01 (01H) : Tremolo

Number	Parameter	Notes
U0	Rate	-
U1	Depth	-

23.3 Algorithm 02 (02H) : 2BandEQ

Number	Parameter	Notes
U0	Low Frequency	Note 1
U1	Low Gain	Note 2
U2	Hi Frequency	Note 3
U3	Hi Gain	Note 2

Note 1: See "25.12 Equalizer Low Frequency Setting Value Table".

Note 2: See "25.15 Equalizer Gain Setting Value Table".

Note 3: See "25.14 Equalizer Hi Frequency Setting Value Table".

23.4 Algorithm 03 (03H) : 3BandEQ

Number	Parameter	Notes
U0	Low Frequency	Note 1
U1	Low Gain	Note 2
U2	Mid Frequency	Note 3
U3	Mid Gain	Note 4
U4	High Frequency	Note 5
U5	High Gain	Note 6

Note 1: See "25.12 Equalizer Low Frequency Setting Value Table".

Note 2: See "25.15 Equalizer Gain Setting Value Table".

Note 3: See "25.13 Equalizer Mid Frequency Setting Value Table".

Note 4: See "25.15 Equalizer Gain Setting Value Table".

Note 5: See "25.14 Equalizer Hi Frequency Setting Value Table".

Note 6: See "25.15 Equalizer Gain Setting Value Table".

23.5 Algorithm 04 (04H) : LFO Wah

Number	Parameter	Notes
U0	Input Level	-
U1	Resonance	-
U2	Manual	-
U3	LFO Rate	-
U4	LFO Depth	-

23.6 Algorithm 05 (05H) : Auto Wah

Number	Parameter	Notes
U0	Input Level	-
U1	Resonance	-
U2	Manual	-
U3	Depth	Note 1
I00	Sensitivity	-

Note 1: See "25.6 -64 to 0 to 63 Setting Value Table."

23.7 Algorithm 06 (06H) : Compressor

Number	Parameter	Notes
U0	Depth	-
U1	Attack	-
U2	Release	-
U3	Level	-
I00	Threshold	Note 1

Note 1: This algorithm adjusts the level at which the compressor effect starts.

23.8 Algorithm 07 (07H) : Limiter

Number	Parameter	Notes
U0	Limit	-
U1	Attack	-
U2	Release	-
U3	Level	-

23.9 Algorithm 08 (08H) : Distortion

Number	Parameter	Notes
U0	Gain	-
U1	Low	-
U2	High	-
U3	Level	-

23.10 Algorithm 09(09H): Stereo Phaser

Number	Parameter	Notes
U0	Resonance	-
U1	Manual Note 1	-
U2	Rate	-
U3	Depth	-
U4	Wet Level	-

Note 1: See "25.6 -64 to 0 to 63 Setting Value Table."

23.11 Algorithm 10 (0AH) : Phaser

Number	Parameter	Notes
U0	Resonance	-
U1	Manual	Note 1
U2	Rate	-
U3	Depth	-
U4	Wet Level	-

Note 1: See "25.6 -64 to 0 to 63 Setting Value Table."

23.12 Algorithm 11 (0BH) : Rotary

Number	Parameter	Notes
U0	Speed	-
U1	Break	Note 1
U2	Fall Accel	-
U3	Rise Accel	-
U4	Slow Rate	-
U5	Fast Rate	-

Note 1: See "25.4 Rotate/Break Setting Value Table".

23.13 Algorithm 12 (0CH) : Overdrive - Rotary

Number	Parameter	Notes
U0	Overdrive Gain	-
U1	Overdrive Level	-
U2	Speed	Note 1
U3	Break	Note 2
U4	Fall Accel	-
U5	Rise Accel	-
U6	Slow Rate	-
U7	Fast Rate	-

Note 1: See "25.3 Slow/Fast Setting Value Table".

Note 2: See "25.4 Rotate/Break Setting Value Table".

23.14 Algorithm 13 (0DH) : Enhancer

Number	Parameter	Notes
U0	Low Frequency	-
U1	Low Gain	-
U2	High Frequency	-
U3	High Gain	-

23.15 Algorithm 14 (0EH) : Ring Modulator

Number	Parameter	Notes
U0	OSC Frequency	-
U1	LFO Rate	-
U2	LFO Depth	-
U3	Wet Level	-
U4	Dry Level	-

23.16 Algorithm 15 (0FH) : LoFi

Number	Parameter	Notes
U0	Noise Level 1	-
U1	Noise Density 1	-
U2	Noise Level 2	-
U3	Noise Density 2	-
U4	Tone	-
U5	Resonance	-
U6	Bass	Note 1
U7	Level	-

Note 1: See "25.6 -64 to 0 to 63 Setting Value Table."

23.17 Algorithm 16 (10H) : 1-Phase Chorus

Number	Parameter	Notes
U0	LFO Rate	-
U1	LFO Depth	-
U2	Feedback	Note 1
U3	Wet Level	-

Note 1: See "25.6 -64 to 0 to 63 Setting Value Table."

23.18 Algorithm 17 (11H) : Sin 2-Phase Chorus

Number	Parameter	Notes
U0	LFO Rate	-
U1	LFO Depth	-
U2	Feedback	Note 1
U3	Wet Level	-

Note 1: See "25.6 -64 to 0 to 63 Setting Value Table."

23.19 Algorithm 18 (12H) : 3-Phase Chorus

Number	Parameter	Notes
U0	Rate1	-
U1	Depth1	-
U2	Rate2	-
U3	Depth2	-
U4	Wet Level	-

23.20 Algorithm 19 (13H) : Tri 2-Phase Chorus

Number	Parameter	Notes
U0	LFO Rate	-
U1	LFO Depth	-
U2	Feedback	Note 1
U3	Wet Level	-

Note 1: See "25.6 -64 to 0 to 63 Setting Value Table."

23.21 Algorithm 20(14H): Stereo Delay 1

Number	Parameter	Notes
U0	Delay Time	-
U1	Wet Level	-
U2	Feedback	-
U3	High Damp	-
U4	Ratio L	-
U5	Ratio R	-

23.22 Algorithm 21(15H): Stereo Delay 2

Number	Parameter	Notes
U0	Delay Time	-
U1	Wet Level	-
U2	Feedback	-
U3	High Damp	-
U4	Ratio L	-
U5	Ratio R	-

23.23 Algorithm 22 (16H) : 3-Tap Delay

Number	Parameter	Notes
U0	Delay Time	-
U1	Wet Level	-
U2	Feedback	-
U3	High Damp	-
U4	Ratio L	-
U5	Ratio C	-
U6	Ratio R	-

23.24 Algorithm 23 (17H) : Gate Reverb

Number	Parameter	Notes
U0	LPF	-
U1	HPF	-
U2	Feedback	-
U3	High-Damp	-
U4	Diffusion	-
U5	Wet Level	-
U6	Dry Level	-

23.25 Algorithm 24 (18H) : Reverse

Number	Parameter	Notes
U0	LPF	-
U1	HPF	-
U2	Feedback	-
U3	High-Damp	-
U4	Diffusion	-
U5	Wet Level	-
U6	Dry Level	-

23.26 Algorithm 25 (19H) : Reflection

Number	Parameter	Notes
U0	Type	Note 1
U1	Wet Level	-
U2	Feedback	-
U3	Tone	-

Note 1: See "25.9 Type0 to Type7 Setting Value Table".

23.27 Algorithm 26 (1AH) : Flanger

Number	Parameter	Notes
U0	LFO Rate	-
U1	LFO Depth	-
U2	Feedback	Note 1
U3	Wet Level	-

Note 1: See the "25.6 -64 to 0 to 63 Setting Value Table."

23.28 Algorithm 27 (1BH) : Reverb

Number	Parameter	Notes
U0	Tone	-
U1	Time	-
U2	High-Damp	-
U3	ER Level	-
U4	Wet Level	-

23.29 Algorithm 28 (1CH) : 2-Tap Delay

Number	Parameter	Notes
U0	Delay Time	-
U1	Wet Level	-
U2	Feedback	-
U3	High Damp	-
U4	Ratio L	-
U5	Ratio R	-

23.30 Algorithm 29 (1DH) : Pedal Effect

Number	Parameter	Notes
U0	Low Frequency	Note1
U1	Low Gain	Note2
U2	Low-Mid Frequency	Note3
U3	Low-Mid Gain	Note4
U4	Mid-High Frequency	Note3
U5	Mid-High Gain	Note4
U6	High Frequency	Note5
U7	High Gain	Note6

Note 1: See "25.12 Equalizer Low Frequency Setting Value Table".

Note 2: See "25.15 Equalizer Gain Setting Value Table".

Note 3: See "25.13 Equalizer Mid Frequency Setting Value Table".

Note 4: See "25.15 Equalizer Gain Setting Value Table".

Note 5: See "25.14 Equalizer Hi Frequency Setting Value Table".

Note 6: See "25.15 Equalizer Gain Setting Value Table".

24 DSP Algorithm List (Multi Effect)

The multi-algorithms (M00 to M31) listed below are combinations of the algorithms described above. Parameter operations and other details are the same as the previous algorithms, so there is no separate explanation provided here.

24.1 Algorithm M00 (20H) : Multi00

Number	Parameter	Notes
U0	Chorus Rate	-
U1	Chorus Depth	-
U2	Chorus Feedback	-
U3	Chorus Wet Level	-
U4	Delay Delay Time	-
U5	Delay Wet Level	-
U6	Delay Feedback	-
U7	Delay High-Damp	-

24.2 Algorithm M01 (21H) : Multi01

Number	Parameter	Notes
U0	Chorus Fast Rate	-
U1	Chorus Fast Depth	-
U2	Chorus Slow Rate	-
U3	Chorus Slow Depth	-
U4	Chorus Wet Level	-
U5	Delay Time	-
U6	Delay Wet Level	-
U7	Delay Feedback	-
I03	Delay High-Damp	-
I04	Delay Ratio L	-
I05	Delay Ratio C	-
I06	Delay Ratio R	-

24.3 Algorithm M02 (22H) : Multi02

Number	Parameter	Notes
U0	Phaser Resonance	-
U1	Phaser Manual	-
U2	Phaser Rate	-
U3	Phaser Depth	-
U4	Chorus Rate 1	-
U5	Chorus Depth 1	-
U6	Chorus Rate 2	-
U7	Chorus Depth 2	-
I03	Phaser Wet Level	-

24.4 Algorithm M03 (23H) : Multi03

Number	Parameter	Notes
U0	Flanger LFO Rate	-
U1	Flanger LFO Depth	-
U2	Flanger Feedback	-
U3	Flanger Wet Level	-
U4	Delay Time	-
U5	Delay Wet Level	-
U6	Delay Feedback	-
U7	Delay High-Damp	-
I06	Delay Ratio L	-
I07	Delay Ratio R	-

24.5 Algorithm M04 (24H) : Multi04

Number	Parameter	Notes
U0	Phaser Resonance	-
U1	Phaser Manual	-
U2	Phaser Rate	-
U3	Phaser Depth	-
U4	Phaser Wet Level	-
U5	Delay Time	-
U6	Delay Wet Level	-
U7	Delay Feedback	-
I05	Delay High-Damp	-
I06	Delay Ratio L	-
I07	Delay Ratio R	-

24.6 Algorithm M05 (25H) : Multi05

Number	Parameter	Notes
U0	Enhancer Low Frequency	-
U1	Enhancer Low Gain	-
U2	Enhancer High Frequency	-
U3	Enhancer High Gain	-
U4	Chorus LFO Rate	-
U5	Chorus LFO Depth	-
U6	Chorus Feedback	-
U7	Chorus Wet Level	-

24.9 Algorithm M08 (28H) : Multi08

Number	Parameter	Notes
U0	Chorus LFO Rate	-
U1	Chorus LFO Depth	-
U2	Chorus Feedback	-
U3	Chorus Wet Level	-
U4	Flanger LFO Rate	-
U5	Flanger LFO Depth	-
U6	Flanger Feedback	-
U7	Flanger Wet Level	-

24.7 Algorithm M06 (26H) : Multi06

Number	Parameter	Notes
U0	Enhancer Low Frequency	-
U1	Enhancer Low Gain	-
U2	Enhancer High Frequency	-
U3	Enhancer High Gain	-
U4	Delay Time	-
U5	Delay Wet Level	-
U6	Delay Feedback	-
U7	Delay High-Damp	-

24.8 Algorithm M07 (27H) : Multi07

Number	Parameter	Notes
U0	Enhancer Low Frequency	-
U1	Enhancer Low Gain	-
U2	Enhancer High Frequency	-
U3	Enhancer High Gain	-
U4	Flanger LFO Rate	-
U5	Flanger LFO Depth	-
U6	Flanger Feedback	-
U7	Flanger Wet Level	-
I06	Flanger Delay Time L	-
I07	Flanger Delay Time R	-

24.10 Algorithm M09 (29H) : Multi09

Number	Parameter	Notes
U0	Chorus LFO Rate	-
U1	Chorus LFO Depth	-
U2	Chorus Feedback	-
U3	Chorus Wet Level	-
U4	Tremolo Rate	-
U5	Tremolo Depth	-

24.11 Algorithm M10 (2AH) : Multi10

Number	Parameter	Notes
U0	Phaser Resonance	-
U1	Phaser Manual	-
U2	Phaser Rate	-
U3	Phaser Depth	-
U4	Phaser Wet Level	-
U5	Auto Pan Rate	-
U6	Auto Pan Depth	-

24.12 Algorithm M11 (2BH) : Multi11

Number	Parameter	Notes
U0	Compressor Depth	-
U1	Compressor Attack	-
U2	Compressor Level	-
U3	Lo-Fi Noise 1	-
U4	Lo-Fi Noise 2	-
U5	Lo-Fi Tone	-
U6	Lo-Fi Resonance	-
U7	Lo-Fi Bass	-
I01	Compressor Release	-
I02	Lo-Fi Noi1 Density	-
I03	Lo-Fi Noi2 Density	-
I04	Lo-Fi Level	-

24.13 Algorithm M12 (2CH) : Multi12

Number	Parameter	Notes
U0	Ring OSC Frequency	-
U1	Ring LFO Rate	-
U2	Ring LFO Depth	-
U3	Ring Wet Level	-
U4	Ring Dry Level	-
U5	Chorus LFO Depth	-
U6	Delay Time	-
U7	Delay Wet Level	-
I00	Chorus LFO Rate	-
I01	Chorus Feedback	-
I02	Chorus Wet Level	-
I09	Delay Feedback	-
I10	Delay High-Damp	-
I11	Delay Ratio L	-
I12	Delay Ratio R	-

24.14 Algorithm M13 (2DH) : Multi13

Number	Parameter	Notes
U0	Ring OSC Frequency	-
U1	Ring LFO Rate	-
U2	Ring LFO Depth	-
U3	Ring Wet Level	-
U4	Ring Dry Level	-
U5	Distortion Gain	-
U6	Distortion Tone	-
U7	Distortion Level	-

24.15 Algorithm M14 (2EH) : Multi14

Number	Parameter	Notes
U0	Lo-Fi Noise 1	-
U1	Lo-Fi Noise 2	-
U2	Lo-Fi Tone	-
U3	Lo-Fi Resonance	-
U4	Reflection Type	-
U5	Reflection Wet Level	-
U6	Reflection Feedback	-
U7	Reflection Tone	-
I00	Lo-Fi Noi1 Dens	-
I01	Lo-Fi Noi2 Dens	-
I02	Lo-Fi Bass	-
I03	Lo-Fi Level	-

24.16 Algorithm M15 (2FH) : Multi15

Number	Parameter	Notes
U0	Distortion Gain	-
U1	Distortion Low	-
U2	Distortion Tone	-
U3	Distortion Level	-
U4	Lo-Fi Noise1	-
U5	Lo-Fi Noise2	-
U6	Lo-Fi Tone	-
U7	Lo-Fi Resonance	-
I12	Lo-Fi Noi1 Dens	-
I13	Lo-Fi Noi2 Dens	-
I14	Lo-Fi Bass	-
I15	Lo-Fi Level	-

24.17 Algorithm M16 (30H) : Multi16

Number	Parameter	Notes
U0	Od Gain	-
U1	Od Level	-
U2	Rot Speed	-
U3	Rot Slow Rate	-
U4	Rot Fast Rate	-
U5	Reflection Wet Level	-
U6	Reflection Feedback	-
U7	Reflection Tone	-
I09	Rot Fall Accel	-
I10	Rot Rise Accel	-
I11	Rot Break	-
I12	Reflection Type	-

24.18 Algorithm M17 (31H) : Multi17

Number	Parameter	Notes
U0	Rot Speed	-
U1	Rot Break	-
U2	Rot Slow Rate	-
U3	Rot Fast Rate	-
U4	Reflection Wet Level	-
U5	Reflection Feedback	-
U6	Reflection Tone	-
I10	Rot Fall Accel	-
I11	Rot Rise Accel	-
I12	Reflection Type	-

24.19 Algorithm M18 (32H) : Multi18

Number	Parameter	Notes
U0	Compressor Depth	-
U1	Compressor Attack	-
U2	Compressor Level	-
U3	Enhancer Low Gain	-
U4	Enhancer High Gain	-
U5	Delay Delay Time	-
U6	Delay Wet Level	-
U7	Delay Feedback	-
I06	Enhancer Low Frequency	-
I07	Enhancer High Frequency	-
I10	Delay High-Damp	-
I11	Delay Ratio L	-
I12	Delay Ratio R	-

24.20 Algorithm M19 (33H) : Multi19

Number	Parameter	Notes
U0	Compressor Depth	-
U1	Compressor Attack	-
U2	Compressor Release	-
U3	Compressor Level	-
U4	Delay Delay Time	-
U5	Delay Wet Level	-
U6	Delay Feedback	-
U7	Delay High-Damp	-
I03	Delay Ratio L	-
I04	Delay Ratio R	-

24.21 Algorithm M20 (34H) : Multi20

Number	Parameter	Notes
U0	Phaser Resonance	-
U1	Phaser Manual	-
U2	Phaser Rate	-
U3	Phaser Depth	-
U4	Chorus LFO Rate	-
U5	Chorus LFO Depth	-
U6	Auto Pan Rate	-
U7	Auto Pan Depth	-

24.22 Algorithm M21 (35H) : Multi21

Number	Parameter	Notes
U0	Wah Resonance	-
U1	Wah Manual	-
U2	Wah Depth	-
U3	Chorus LFO Rate	-
U4	Chorus LFO Depth	-
U5	Delay Delay Time	-
U6	Delay Wet Level	-
U7	Delay Feedback	-
I10	Delay High-Damp	-
I11	Delay Ratio L	-
I12	Delay Ratio R	-

24.23 Algorithm M22 (36H) : Multi22

Number	Parameter	Notes
U0	Wah Resonance	-
U1	Wah Manual	-
U2	Wah LFO Rate	-
U3	Wah LFO Depth	-
U4	Chorus LFO Depth	-
U5	Delay Time	-
U6	Delay Wet Level	-
U7	Delay Feedback	-
I09	Delay High-Damp	-
I10	Delay Ratio L	-
I11	Delay Ratio R	-

24.24 Algorithm M23 (37H) : Multi23

Number	Parameter	Notes
U0	Compressor Depth	-
U1	Compressor Attack	-
U2	Compressor Level	-
U3	Chorus LFO Rate	-
U4	Chorus LFO Depth	-
U5	Reflection Wet Level	-
U6	Reflection Feedback	-
U7	Reflection Tone	-

24.25 Algorithm M24 (38H) : Multi24

Number	Parameter	Notes
U0	Distortion Gain	-
U1	Distortion Low	-
U2	Distortion Hi	-
U3	Distortion Level	-
U4	Chorus LFO Depth	-
U5	Delay Delay Time	-
U6	Delay Wet Level	-
U7	Delay Feedback	-
I09	Delay High-Damp	-
I10	Delay Ratio L	-
I11	Delay Ratio R	-

24.28 Algorithm M27 (3BH) : Multi27

Number	Parameter	Notes
U0	Wah Manual	-
U1	Wah LFO Rate	-
U2	Wah LFO Depth	-
U3	Distortion Gain	-
U4	Distortion Level	-
U5	Delay Delay Time	-
U6	Delay Wet Level	-
U7	Delay Feedback	-
I02	Wah Resonance	-
I08	Delay High-Damp	-
I09	Delay Ratio L	-
I10	Delay Ratio R	-

24.26 Algorithm M25 (39H) : Multi25

Number	Parameter	Notes
U0	Compressor Depth	-
U1	Distortion Gain	-
U2	Distortion Low	-
U3	Distortion Hi	-
U4	Distortion Level	-
U5	Delay Delay Time	-
U6	Delay Wet Level	-
U7	Delay Feedback	-
I01	Compressor Attack	-
I02	Compressor Release	-
I03	Compressor Level	-
I07	Delay High-Damp	-
I08	Delay Ratio L	-
I09	Delay Ratio R	-

24.29 Algorithm M28 (3CH) : Multi28

Number	Parameter	Notes
U0	Distortion Gain	-
U1	Distortion Low	-
U2	Distortion Tone	-
U3	Distortion Level	-
U4	Delay Time	-
U5	Delay Wet Level	-
U6	Delay Feedback	-
U7	Delay High-Damp	-
I12	Delay Ratio L	-
I13	Delay Ratio C	-
I14	Delay Ratio R	-

24.27 Algorithm M26 (3AH) : Multi26

Number	Parameter	Notes
U0	Wah Manual	-
U1	Wah Depth	-
U2	Distortion Gain	-
U3	Distortion Tone	-
U4	Distortion Level	-
U5	Delay Delay Time	-
U6	Delay Wet Level	-
U7	Delay Feedback	-
I04	Wah Resonance	-
I09	Delay High-Damp	-
I10	Delay Ratio L	-
I11	Delay Ratio R	-

24.30 Algorithm M29 (3DH) : Multi29

Number	Parameter	Notes
U0	Distortion Gain	-
U1	Distortion Low	-
U2	Distortion Tone	-
U3	Distortion Level	-
U4	Phaser Resonance	-
U5	Phaser Manual	-
U6	Phaser Rate	-
U7	Phaser Depth	-
I12	Phaser Input Level	-
I15	Phaser Wet Level	-

24.31 Algorithm M30 (3EH) : Multi30

Number	Parameter	Notes
U0	Distortion Gain	-
U1	Distortion Low	-
U2	Distortion Tone	-
U3	Distortion Level	-
U4	Chorus LFO Rate	-
U5	Chorus LFO Depth	-
U6	Chorus Feedback	-
U7	Chorus Wet Level	-

24.32 Algorithm M31 (3FH) : Multi31

Number	Parameter	Notes
U0	Distortion Gain	-
U1	Distortion Low	-
U2	Distortion Tone	-
U3	Distortion Level	-
U4	Flanger LFO Rate	-
U5	Flanger LFO Depth	-
U6	Flanger Feedback	-
U7	Flanger Wet Level	-

25.3 Slow/Fast Setting Value Table

Value	Transmit	Receive
Slow	00H	00H-3FH
Fast	7FH	40H-7FH

25.4 Rotate/Break Setting Value Table

Value	Transmit	Receive
Rotate	00H	00H-3FH
Break	7FH	40H-7FH

25.5 -24 - 0 - 24 Setting Value Table

Value	Transmit/Receive
-24	28H
:	:
0	40H
:	:
24	58H

25.6 -64 - 0 - 63 Setting Value Table

Value	Transmit/Receive
-64	00H
-63	01H
:	:
0	40H
:	:
62	7EH
63	7FH

25.7 Pan Setting Value Table

Value	Transmit/Receive
Left	00H
:	:
Center	40H
:	:
Right	7FH

Part VIII

Setting Values and Send/ Receive Values

25 Setting Value Table

25.1 Off/On Setting Value Table

Value	Transmit	Receive
Off	00H	00H-3FH
On	7FH	40H-7FH

25.2 DamperPedalOperationValueTable

Value	Transmit
Off	00H
Half	00H-7FH(Note 1)
On	7FH

Note 1: Depends on this Instrument's damper pedal adjustment value".

25.8 -99 - 0 - 99 Setting Value Table

Value	Transmit/Receive
	(MSB-LSB)
-99	00H-40H
:	:
0	40H-00H
:	:
99	7FH-00H

25.9 Type 0 to Type 7 Setting Value Table

Value	Transmit	Receive
Type0	00H	00H-0FH
Type1	10H	10H-1FH
Type2	20H	20H-2FH
Type3	30H	30H-3FH
Type4	40H	40H-4FH
Type5	50H	50H-5FH
Type6	60H	60H-6FH
Type7	70H	70H-7FH

25.10 Reverb Type Setting Value Table

Value	Transmit/Receive
Room1	00H
Room2	01H
Room3	02H
Hall1	03H
Hall2	04H
Plate1	05H
Delay	06H
Panning Delay	07H
Plate2	08H
Plate3	09H
Large Room1	0AH
Large Room2	0BH
Stadium1	0CH
Stadium2	0DH
Long Delay	0EH
Long Panning Delay	0FH

25.11 Chorus Type Setting Value Table

Value	Transmit/Receive
Chorus1	00H
Chorus2	01H
Chorus3	02H
Chorus4	03H
Feedback Chorus	04H
Flanger1	05H
Short Delay	06H
Short Delay FB	07H
Soft Chorus	08H
Bright Chorus	09H
Deep Chorus	0AH
Flanger2	0BH
Flanger3	0CH
Flanger4	0DH
Short Delay Modulation	0EH
Short Delay Modulation FB	0FH

25.12 Equalizer Low Frequency Setting Value Table

Value	Transmit	Receive
0(200Hz)	00H	00H-2AH
1(400Hz)	40H	2BH-55H
2(800Hz)	7FH	56H-7FH

25.13 Equalizer Mid Frequency Setting Value Table

Value	Transmit	Receive
0(1.0KHz)	00H	00H-0FH
1(1.3KHz)	10H	10H-1FH
2(1.6KHz)	20H	20H-2FH
3(2.0KHz)	30H	30H-3FH
4(3.0KHz)	40H	40H-4FH
5(4.0KHz)	50H	50H-5FH
6(6.0KHz)	60H	60H-6FH
7(8.0KHz)	70H	70H-7FH

25.14 Equalizer High Frequency Setting Value Table

Value	Transmit	Receive
0(6.0KHz)	00H	00H-2AH
1(8.0KHz)	40H	2BH-55H
2(10.0KHz)	7FH	56H-7FH

25.15 Equalizer Gain Setting Value Table

Value	Transmit	Receive
-12	00H	00H-04H
-11	05H	05H-09H
-10	0AH	0AH-0EH
-9	0FH	0FH-13H
-8	14H	14H-18H
-7	19H	19H-1DH
-6	1EH	1EH-22H
-5	23H	23H-27H
-4	28H	28H-2CH
-3	2DH	2DH-31H
-2	32H	32H-36H
-1	37H	37H-3BH
0	3CH	3CH-43H
+1	44H	44H-48H
+2	49H	49H-4DH
+3	4EH	4EH-52H
+4	53H	53H-57H
+5	58H	58H-5CH
+6	5DH	5DH-61H
+7	62H	62H-66H
+8	67H	67H-6BH
+9	6CH	6CH-70H
+10	71H	71H-75H
+11	76H	76H-7AH
+12	7BH	7BH-7FH

Note 4: The parameter value is not equivalent to dB (decibels).

25.17 Drawbar Position Setting Value Table

Value	Transmit	Receive
0	00H	00H-1FH
1	20H	20H-3FH
2	40H	40H-5FH
3	60H	60H-7FH

25.16 DSP Algorithm ID Table

Algorithm	ID
00	00H
01	01H
02	02H
03	03H
:	:
28	1CH
M00	20H
M01	21H
M02	22H
M03	23H
:	:
M31	3FH

25.18 DSP Preset List

Preset	AlgorithmID	Effect
00	03	Equalizer
01	06	Compressor 1
02	06	Compressor 2
03	07	Limiter
04	13	Enhancer
05	10	Phaser
06	09	Stereo Phaser
07	16	Chorus 1
08	17	Chorus 2
09	19	Chorus 3
10	18	Chorus 4
11	M05	Enhancer - Chorus
12	26	Flanger
13	M07	Enhancer - Flanger
14	28	Delay
15	22	3-Tap Delay
16	20	Stereo Delay
17	21	Stereo Cross Delay
18	M06	Enhancer Delay
19	25	Reflection
20	M02	Phaser - Chorus 1
21	M02	Phaser - Chorus 2
22	M04	Phaser - Delay 1
23	M04	Phaser - Delay 2
24	M00	Chorus - Delay 1
25	M00	Chorus - Delay 2
26	M01	Chorus - Delay 3
27	M01	Chorus - Delay 4
28	M19	Compressor - Delay
29	M18	Compressor - Enhancer -Delay
30	M23	Compressor - Chorus -Reflection
31	M08	Chorus - Flanger
32	M03	Flanger - Delay 1
33	M03	Flanger - Delay 2
34	27	Reverb Room 1
35	27	Reverb Room 2
36	27	Reverb Room 3
37	27	Reverb Hall 1
38	27	Reverb Hall 2
39	27	Reverb Plate
40	23	Gate Reverb 1
41	23	Gate Reverb 2
42	24	Gate Reverb 3
43	24	Gate Reverb 4
44	01	Tremolo
45	M09	Chorus - Tremolo
46	00	Auto Pan
47	M10	Phaser - Auto Pan 1
48	M10	Phaser - Auto Pan 2
49	M20	Phaser - Chorus - Auto Pan

50	11	Rotary 1
51	11	Rotary 2
52	12	Overdrive - Rotary 1
53	12	Overdrive - Rotary 2
54	M17	Rotary - Reflection 1
55	M17	Rotary - Reflection 2
56	M17	Rotary - Reflection 3
57	M16	Overdrive - Rotary - Reflection 1
58	M16	Overdrive - Rotary - Reflection 2
59	M16	Overdrive - Rotary - Reflection 3
60	04	LFO Wah
61	05	Auto Wah
62	M21	Auto Wah - Chorus - Delay
63	M22	LFO Wah - Chorus - Delay
64	08	Crunch
65	08	Overdrive
66	08	Distortion 1
67	08	Distortion 2
68	08	Metal
69	08	Fuzz
70	M29	Crunch - Phaser
71	M29	Overdrive - Phaser
72	M30	Crunch - Chorus
73	M30	Overdrive - Chorus
74	M30	Distortion - Chorus
75	M30	Metal - Chorus
76	M31	Distortion - Flanger
77	M31	Metal - Flanger
78	M28	Crunch - Delay
79	M28	Overdrive - Delay
80	M28	Distortion - Delay 1
81	M28	Distortion - Delay 2
82	M28	Metal - Delay
83	M28	Fuzz - Delay
84	M24	Crunch - Chorus - Delay
85	M24	Distortion - Chorus - Delay
86	M25	Compressor - Crunch - Delay
87	M26	Auto Wah - Crunch - Delay
88	M26	Auto Wah - Overdrive - Delay
89	M26	Auto Wah - Distortion - Delay
90	M27	LFO Wah - Overdrive - Delay
91	M27	LFO Wah - Distortion - Delay
92	14	Ring Modulator
93	M12	Ring Modulator - Chorus - Delay
94	M13	Ring Modulator - Distortion
95	15	Lo-Fi
96	M11	Compressor - Lo-Fi
97	M14	Lo-Fi - Reflection
98	M15	Crunch - Lo-Fi
99	M15	Distortion - Lo-Fi

Part IX

MIDI Implementation Notation

25.19 Hexadecimal Notation

MIDI implementation sometimes requires that data be expressed in hexadecimal format. Hexadecimal values are indicated by the letter "H" after the value. The hexadecimal equivalents of decimal values 10 through 15 are expressed as the letters "A" through "F". The table below shows the hexadecimal equivalents for the decimal values 0 through 127, which are often used for settings.

Decimal	Hexadecimal	Decimal	Hexadecimal	Decimal	Hexadecimal	Decimal	Hexadecimal
0	00H	32	20H	64	40H	96	60H
1	01H	33	21H	65	41H	97	61H
2	02H	34	22H	66	42H	98	62H
3	03H	35	23H	67	43H	99	63H
4	04H	36	24H	68	44H	100	64H
5	05H	37	25H	69	45H	101	65H
6	06H	38	26H	70	46H	102	66H
7	07H	39	27H	71	47H	103	67H
8	08H	40	28H	72	48H	104	68H
9	09H	41	29H	73	49H	105	69H
10	0AH	42	2AH	74	4AH	106	6AH
11	0BH	43	2BH	75	4BH	107	6BH
12	0CH	44	2CH	76	4CH	108	6CH
13	0DH	45	2DH	77	4DH	109	6DH
14	0EH	46	2EH	78	4EH	110	6EH
15	0FH	47	2FH	79	4FH	111	6FH
16	10H	48	30H	80	50H	112	70H
17	11H	49	31H	81	51H	113	71H
18	12H	50	32H	82	52H	114	72H
19	13H	51	33H	83	53H	115	73H
20	14H	52	34H	84	54H	116	74H
21	15H	53	35H	85	55H	117	75H
22	16H	54	36H	86	56H	118	76H
23	17H	55	37H	87	57H	119	77H
24	18H	56	38H	88	58H	120	78H
25	19H	57	39H	89	59H	121	79H
26	1AH	58	3AH	90	5AH	122	7AH
27	1BH	59	3BH	91	5BH	123	7BH
28	1CH	60	3CH	92	5CH	124	7CH
29	1DH	61	3DH	93	5DH	125	7DH
30	1EH	62	3EH	94	5EH	126	7EH
31	1FH	63	3FH	95	5FH	127	7FH

25.20 Binary Notation

When a MIDI implementation data value is expressed in binary, the letter "B" (for "binary") is affixed at the end of the value. The table below shows the binary equivalents for the decimal values 0 through 127, which are often used for settings (middle part omitted).

Decimal	Hexadecimal	Binary
0	00H	00000000B
1	01H	00000001B
2	02H	00000010B
3	03H	00000011B
4	04H	00000100B
5	05H	00000101B
6	06H	00000110B
7	07H	00000111B
8	08H	00001000B
9	09H	00001001B
10	0AH	00001010B
11	0BH	00001011B
12	0CH	00001100B
13	0DH	00001101B
14	0EH	00001110B
15	0FH	00001111B
16	10H	00010000B
:	:	
125	7DH	01111101B
126	7EH	01111110B
127	7FH	01111111B

CASIO®

CASIO COMPUTER CO.,LTD.

6-2, Hon-machi 1-chome
Shibuya-ku, Tokyo 151-8543, Japan

MA0508-A