
About This Manual

Operation Guide 5444/5524

ENGLISH Congratulations upon your selection of this CASIO watch. Note that CASIO COMPUTER CO., LTD. assumes no responsibility for any E-1 Note that the product illustrations in this manual are intended for reference only, and so the actual product may appear somewhat different than depicted by an illustration.

damage or loss suffered by you or any third party arising through the use of your watch or its malfunction.

• The operational procedures for Modules 5444 and 5524 are identical. All of the illustrations in this manual show Module 5444. Depending on the model of your watch, display text appears either as dark figures on a light background, or light figures on a dark background. All examples in this manual are shown using dark figures on a light background. Button operations are indicated using the letters shown in the illustration. Ð м THU 6.0 6 35 36 36 ര 0 C Module 5444 Module 5524 E-2 Things to check before using the watch 1. Check the battery power level. YES

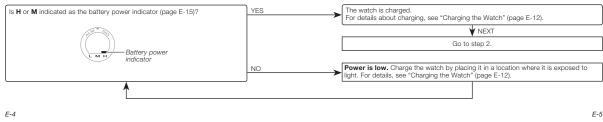

2. Check the Home City and the daylight saving time (DST) setting.

Use the procedure under "To configure Home City settings" (page E-42) to configure your Home City and daylight saving time settings.

Important!

Proper time calibration signal reception and World Time Mode data depend on correct Home City, time, and date settings in the Timekeeping Mode. Make sure you configure these settings correctly.

3. Set the current time.

- To set the time using a time calibration signal See "To get ready for a receive operation" (page E-26).
- To set the time manually See "Configuring Current Time and Date Settings Manually" (page E-48).

E-6

Contents

About This Manual	E-2
Things to check before using the watch	E-4
Charging the Watch	E-12
To recover from the sleep state	E-20
Radio Controlled Atomic Timekeeping	E-21
To get ready for a receive operation	E-26
To perform manual receive	E-29
To check the latest signal reception results	E-33
To turn auto receive on and off	E-34
Mode Reference Guide	E-37
Timekeeping	

Configuring Home City Settings E-42
To configure Home City settings E-42
To change the Daylight Saving Time (summer time) setting E-45
Configuring Current Time and Date Settings Manually E-48
To change the current time and date settings manually E-48
Using the World Time ModeE-53
To enter the World Time Mode E-53
To view the time in another time zone E-53
To specify standard time or daylight saving time (DST) for a city E-54
To swap your Home Time and World Time Cities E-55
Using the Stopwatch E-57
To enter the Stopwatch Mode E-57
To perform an elapsed time operation E-58
To pause at a split timeE-58
To measure two finishes E-58
E-9

The watch is now ready for use.

For details about the watch's radio controlled timekeeping feature, see "Radio Controlled Atomic Timekeeping" (page E-21).

E-7

E-3



CASIO,

.E-75

E-75

E-78

F-79

E-80

.. E-81

F-81

. E-83

. E-85

.E-92

F-11

Using the Countdown TimerE	-60
To enter the Countdown Timer Mode E-	
To specify the countdown start time E-	-60
To perform a countdown timer operation E-	-62
To stop the alarm E-	-62
Using the AlarmE	-63
To enter the Alarm Mode	
To set an alarm timeE-	
To test the alarmE	-65
To turn an alarm and the Hourly Time Signal on and off	-66
To stop the alarmE	-66
Illumination	-68
To turn on illumination manuallyE-	
To change the illumination duration E-	
To turn the auto light switch on and offE	

F-10

Charging the Watch

The face of the watch is a solar panel that generates power from light. The generated power charges a built-in rechargeable battery, which powers watch operations. The watch charges whenever it is exposed to light.

Storing the watch for long periods in an area where there is no light or wearing it in such a way that it is blocked from exposure to light can cause power to run down.

You can get an idea of the watch's power level by observing the battery power indicator in the lower digital dial.

• At Level 5, all functions are disabled and settings return to their initial factory defaults. Once the battery reaches Level 2 (M) after falling to Level 5, reconfigure the current time, date, and other settings.

Leaving the watch exposed to direct sunlight or some other very strong light source can cause the battery power indicator to show a reading temporarily that is higher than the actual battery level. The correct battery level should be indicated

The current time and all other settings return to their initial factory defaults whenever battery power drops to Level 5 and when you have the battery replaced.

Display indicators reappear as soon as the battery is charged from Level 5 to

Charging Guide



Power Levels

6-30 THI

38

LMH

Battery power indicator

Level 2 (M).

after a few minutes.

E-12

A)

C

E-14

Whenever you are not wearing the watch, leave it in a location where it is exposed to light. Best charging performance is achieved by exposing the watch to the strongest light available.

Expose the watch to bright light whenever possible.

B

//_



When wearing the watch, make sure that its face is not blocked from light by the sleeve of your clothing. The watch may enter a sleeve even only partially.

Warning!

Leaving the watch in bright light for charging can cause it to become quite hot. Take care when handling the watch to avoid burn injury. The watch can become particularly hot when exposed to the following conditions for long periods. On the dashboard of a car parked in direct sunlight
Too close to an incandescent lamp

Hand Home Position Adjustment.

Other Settings

Specifications....

Troubleshooting

To adjust home positions manually......

To move the hands to view a digital dial ...

Moving the Hands for Easy Viewing of the Digital Dials ...

To return the hands to their normal positions

To turn the button operation tone on and off.....

To turn Power Saving on and off

Important!

Under direct sunlight

- Allowing the watch to become very hot can cause the digital displays to black out. The appearance of the LCD should become normal again when the watch returns to a lower temperature. Turn on the watch's Power Saving function (page E-19) and keep it in an area normally exposed to bright light when storing it for long periods. This helps to ensure that power down pat run down.
- power does not run down.

E-13

Level	Battery Power Indicator	Function Status
1 (H)	All functions enabled.	
2 (M)		All functions enabled.
3 (L and LOW)		Auto and manual receive, illumination, and beeper disabled. Except for Timekeeping Mode, all other modes disabled.
(CHG)	All functions and display indicators disabled e for timekeeping and display of CHG (charge) lower digital dial. Hour and minute hands stopped at 12 o'cloc	
5		All functions disabled.

• The flashing LOW message at Level 3 (L) tells you that battery power is very low, and that exposure to bright light for charging is required as soon as possible.

E-15

Power Recovery Mode

- Performing multiple illumination, beeper, and/or high-speed hand movement operation during a short period may cause all of the battery power indicators (H, M, and L) to start flashing in the lower digital dial. This indicates that the watch is the power recovery mode. Illumination, alarm, countdown timer alarm, and hourly time signal operations will be disabled until battery power recovers. is in
- Battery power will recover in about 15 minutes. At this time, the battery power indicators (H, M, L) will stop flashing. This indicates that the functions listed above
- Indicators (**r**, **m**, **L**) will stop flashing. This indicates that the functions index above are enabled again. If all of the battery power indicators (**H**, **M**, **L**) are flashing and the **CHG** (charge) message also is flashing, it means the battery level is very low. Expose the watch to bright light as soon as possible.
- Frequent flashing of all of the battery power indicators (H, M, L) probably means that remaining battery power is low. Leave the watch in bright light to allow it to charge.

E-17

- The above exposure times all are for reference only. Actual exposure times depend on lighting conditions
- For details about the operating time and daily operating conditions, see the "Power Supply" (page E-94) section of the Specifications.

Power Saving

When turned on, Power Saving enters a sleep state automatically whenever the watch is left for a certain period in an area where it is dark. The table below shows how watch functions are affected by Power Saving. • For information about enabling and disabling power saving, see "To turn Power

Saving on and off" (page E-83). • There actually are two sleep state levels: "display sleep" and "function sleep".

E-16

Charging Times

	Daily	Level Change *2				
(Brightness) Operation		Level 5	Level 4	Level 3	Level 2	Level 1
(Enginations)	*1	\longrightarrow		\rightarrow	\rightarrow	
Outdoor sunlight (50,000 lux)	8 min.	3 hours *3, *4		23 hours *3 24 hours *4	6 hours *3 7 hours *4	
Window sunlight (10,000 lux)	30 min.	7 hours *3, *4		85 hours *3 89 hours *4		
Window sunlight on cloudy day (5,000 lux)	48 min.	11 hours *3, *4		138 hours *3 144 hours *4		
Indoor fluorescent lighting (500 lux)	8 hours	138 hours *3 141 hours *4				

Approximate exposure each day to generate power for normal daily operation.

* 2 Approximate exposure time (in hours) required to take power up one level * 3 Module 5444

*	4	Module	55	52	4

F-18

F-19

CASIO.

Elapsed Time in Dark	Digital Dials	Operation
60 to 70 minutes (display sleep)	Blank	Digital dials are off, but all functions are enabled.
6 or 7 days (function sleep)	Blank	Hour and minute hands stop at 12 o'clock. All functions are disabled, but timekeeping is maintained.

The watch will not enter a sleep state between 6:00 AM and 9:59 PM. If the watch is already in a sleep state when 6:00 AM arrives, however, it will remain in the sleep state.

The watch can receive the signal from the transmitter located here:

Anthorn (England), Mainflingen (Germany)

Fukushima (Japan), Fukuoka/Saga (Japan)

Chinese Signal

-54

1,500 kilometers

4

Changchun Beijing Shangqiu Shangqiu

_ Shanghai

— Chengdu Hong Kong

Fort Collins, Colorado (United States)

Shanggiu City (China)

Important:
 The areas covered by MOW, HNL and ANC are quite far from the calibration signal transmitters, so certain conditions may cause reception problems.
 When HKG or BJS is selected as the Home City, only the time and date are adjusted according to the time calibration signal. You need to switch manually between standard time and daylight saving time (DST) if required. See "To configure Home City settings" (page E-42) for information about how to do this.

500 kilo

. The watch will not enter a sleep state while it is in the Stopwatch Mode or Countdown Timer Mode

To recover from the sleep state

If your Home City Code setting is this:

LIS, LON, MAD, PAR, ROM, BER, STO, ATH, MOW

HNL, ANC, YVR, LAX, YEA, DEN, MEX, CHI, NYC, YHZ, YYT

Japanese Signals

Signals are receivable in the Taiwan ar when reception conditions are good.

To get ready for a receive operation

500 kilomete

Fukuoka/Saga

Fukushim

1,000 kilometers

good

-12 o'clock

10

E-20

HKG, BJS

Important!

E-22

E-24

E-26

TPE, SEL, TYC


Move the watch to a well-lit area or press any button.

Radio	Controlled	Atomic	Timekeeping

This watch receives a time calibration signal and updates its time setting accordingly. However, when using the watch outside of areas covered by time calibration signals, you will have to adjust the settings manually as required. See "Configuring Current Time and Date Settings Manually" (page E-48) for more information of the setting settings and the settings for the setting set information

Information. This section explains how the watch updates its time settings when the city code selected as the Home City is in Japan, North America, Europe, or China, and is one that supports time calibration signal reception.

F-21




E-23

- Even when the watch is within range of a transmitter, signal reception may be impossible due to the effects of geographic contours, structures, weather, the time of year, the time of day, radio interference, etc. The signal becomes weaker at distances of approximately 500 kilometers, which means that the influence of the conditions listed above becomes even greater.
 Signal reception may not be possible at the distances noted below during certain times of the year or day. Radio interference may also cause problems with recention
- reception.
- Mainflingen (Germany) or Anthorn (England) transmitters: 500 kilometers
- (310 miles) Fort Collins (United States) transmitter: 600 miles (Jood kilometers) Fukushima or Fukuck/Saga (Japan) transmitters: 500 kilometers (310 miles) Shangqiu (China) transmitter: 500 kilometers (310 miles)
- As of July 2016, China does not use Daylight Saving Time (DST). If China does go to the Daylight Saving Time system in the future, some functions of this watch may no longer operate correctly.

E-25

Signal reception may be difficult or even impossible under the conditions
described below.



E-27

3. What you should do next depends on whether you are using Auto Receive or Manual Receive.

1. Confirm that the watch is in the Timekeeping Mode. If it isn't, use \bigcirc to enter the Timekeeping Mode (page E-38). 2. The antenna of this watch is located on its 12 o'clock side. Position the watch

- Auto Receive: Leave the watch over night in the location you selected in step 2. See "Auto Receive" below for details.
 Manual Receive: Perform the operation under "To perform manual receive" on
- page E-29.

Auto Receive

۲

- Auto neceive With Auto Receive, the watch performs the receive operation each day automatically up to six times (up to five times for the Chinese calibration signal) between the hours of midnight and 5 a.m. (according to the Timekeeping Mode time). When any receive operation is successful, none of the other receive operations for that day are performed.
- operations for that day are performed. When a calibration time is reached, the watch will perform the receive operation only if it is in the Timekeeping Mode or World Time Mode. The receive operation is not performed if a calibration time is reached while you are configuring settings, while a countdown timer operation is in progress, or while the hands have been moved for easier viewing of the digital dials (page E-79).
- . You can use the procedure under "To turn auto receive on and off" (page E-34) to enable or disable auto receive

To perform manual receive



In the Timekeeping Mode, hold down D until the watch beeps. A signal level indicator (L1, L2, or L3, see page E-32)

appears in the lower digital dial after reception starts. Do not move the watch or perform any button operation until **GET** or **ERR** appears in the right digital dial.

F-28

at night.

- The receive operation takes from three
- Signal reception normally is better
- The receive operation takes from three to eight minutes, but in some cases it can take as long as 16 minutes. Take care that you do not perform any button operation or move the watch during this time.

- with 12 o'clock facing towards a window as shown in the nearby illustration. Make sure there are no metal objects nearby.

CASIO,



If the receive operation is successful, the reception date and time appear in the left digital dial. The watch will return to the Timekeeping Mode if you press () or if you do not perform any button operation for about one or two minutes.

Receive failed



 If the current reception fails but a previous reception. In the current reception fails but a previous reception (within the last 24 hours) was successful, the right digital dial will show RCVD and **ERR**. If only **ERR** is displayed (without RCVD), it means that all of the receive operations over the past 24 hours have failed. The watch will return to the Timekeeping Mode without changing the time setting if you press ()) or if you do not perform any button operation for about one or two minutes. one or two minutes.

Note

Note

• To interrupt a receive operation and return to the Timekeeping Mode, press any button.

E-30

Signal Level Indicator



Signal le vel indicator As you watch the indicator, keep the watch in a location that best maintains stable reception. Even under optimum reception conditions, it can take

L 1

Weak

(Unstable)

During manual receive, the lower digital dial shows a signal level indicator as shown below.

15

L 3

Strong (Stable

about 10 seconds for reception to stabilize.
Note that weather, the time of day, surroundings, and other factors all can affect reception.

E-32

E-34

To turn auto receive on and off



- 1. In the Timekeeping Mode, press (D) (page E-41). 2. Hold down (A) until the current auto receive setting (On or OFF) and RCVD indicator start to flash. This is the setting mode.
- Whenever you enter the setting mode, the analog hands will automatically move to positions that allow easier viewing of the digital dials.
 Note that the watch will not enter the setting mode if the currently selected Home City is one that does not automating adibrating recording.
- support time calibration reception.

3. Press O to toggle between auto receive on (\mathbf{On}) and off (OFF)

B 6·30 GET D

► 0:08

To check the latest signal reception results In the Timekeeping Mode, press (D) (page E-41). When receive is successful, the left digital dial shows the time and date that receive was successful. -: --indicates that none of the receive operations were successful

To return to the Timekeeping Mode, press (D)

 RCVD will not be displayed in the right digital dial if you have adjusted the time or date setting manually since the last receive operation.

E-33

F-31

4. Press (A) to exit the setting mode

Press (a) to exit the setting mode. Exiting a setting mode will normally cause the hands to return to regular timekeeping automatically. However, if you manually move the hands (page E-79) and then enter a setting mode, they will not return to regular timekeeping automatically when you exit the setting mode. In this case, you will need to return the hands to their normal positions manually (page E-80).

Radio-controlled Atomic Timekeeping Precautions

- Strong electrostatic charge can result in the wrong time setting.
- Strong electrostatic charge can result in the wrong time setting.
 Even if a receive operation is successful, certain conditions can cause the time setting to be off by up to one second.
 The watch is designed to update the date and day of the week automatically for the period January 1, 2000 to December 31, 2099. Updating of the date by signal reception will no longer be performed starting from January 1, 2100.
 If you are in an area where signal reception is not possible, the watch keeps time with the precision noted in "Specifications" (page E-92).

E-35

Mode Reference Guide

Your watch has "five modes". The mode you should select depends on what you want to do

To do this:	Enter this mode:	See:
View the current date in the Home City Configure Home City and daylight saving time (DST) settings Configure time and date settings manually Perform at time calibration receive operation Check whether the last receive operation was successful Switch between 12-hour and 24-hour timekeeping Display an alarm countdown	Timekeeping Mode	E-41
View the current time in one of 48 cities (31 time zones) around the globe	World Time Mode	E-53
Use the stopwatch to measure elapsed time	Stopwatch Mode	E-57
Use the countdown timer	Countdown Timer Mode	E-60
Set an alarm time	Alarm Mode	E-63
		E-37


E-36

Selecting a Mode

. The illustration below shows which buttons you need to press to navigate between modes

The receive operation is disabled under any of the following conditions.
While power is at Level 3 (L) or lower (page E-15)
While the watch is in the power recovery mode (page E-17)
When the watch is in the function sleep state ("Power Saving", page E-19)
While a countdown timer operation is in progress (page E-60)
While hands are in positions to allow easier viewing of the digital dials (page E-79)
A receive operation is cancelled if an alarm sounds while it is being performed.
The Home City setting reverts to the initial default of **TYO** (Tokyo) whenever the battery power level drops to Level 5 or when you have the rechargeable battery replaced. If this happens, change the Home City to the setting you want (page E-42).

To return to the Timekeeping Mode from any other mode, hold down © for at least four seconds



CASIO,

General Functions (All Modes)

The functions and operations described in this section can be used in all of the modes

Auto Return Features

- The watch returns to the Timekeeping Mode automatically if you do not perform any button operation for two or three minutes in the Alarm Mode.
 If you leave the watch in a setting mode (with flashing digits) for two or three
- minutes without performing any operation, the watch will exit the setting mode automatically

Initial Screens

When you enter the World Time or Alarm Mode, the data you were viewing when you last exited the mode appears first.

Scrolling

The (B) and (D) buttons are used in the setting mode to scroll through data. In most cases, holding down these buttons during a scroll operation scrolls through the data at high speed. F-40

Configuring Home City Settings

There are two Home City settings: actually selecting the Home City, and selecting either standard time or daylight saving time (DST).

To configure Home City settings



 In the Timekeeping Mode, hold down (A) for about two seconds until ADJ appears in the right digital dial. When you release (A), the city code and city name will scroll across the right digital dial. This is the setting mode. The watch will exit the setting mode automatically it

you do not perform any operation for about two or three minutes.

. For details about city codes, see the "City Code Table" at the back of this manual

Whenever you enter a setting mode, the analog hands will automatically move to positions that allow easier viewing of the digital dials.

E-42


Note that you cannot switch between standard time and daylight saving time (DST) while UTC is selected as your Home City.

- 5. After the setting is the way you want, press (A) to return to the Timekeeping
- The DST indicator appears to indicate that Daylight Saving Time is turned on. • The Dor Indicate appear to indicate a management of the adverse of the studied of the studi eping

Note

- · After you specify a city code, the watch will use UTC* offsets in the World Time Mode to calculate the current time for other time zones based on the current time in your Home City.
- i) your nome ony. Coordinated Universal Time, the world-wide scientific standard of timekeeping. The reference point for UTC is Greenwich, England.
- F-44

3. Use D to cycle through the DST settings in the sequence shown below



- The Auto DST (AUTO) setting will be available only when a city code that supports time calibration signal reception (page E-21) is selected as the Home City. While Auto DST is selected, the DST setting will be changed automatically in accordance with time calibration signal data.
- 4. After the setting is the way you want, press (A) to return to the Timekeeping

The DST indicator appears to indicate that Daylight Saving Time is turned on

Configuring Current Time and Date Settings Manually

You can configure current time and date settings manually when the watch is unable to receive a time calibration signal


To change the current time and date settings manually



I. In the Timekeeping Mode, hold down (a) for about two seconds until ADJ appears in the right digital dial. When you release (a), the city code and city name will scroll across the right digital dial. This is the setting mode.

 Whenever you enter a setting mode, the analog hands will automatically move to positions that allow easier viewing of the digital dials.

Timekeeping





- Use (D) (East) and (B) (West) to scroll through the city codes in the right digital dial until the one you want to use as your Home City is displayed.
- 3. Press (C) so the DST indicator is flashing in the left digital dial, which indicates the DST setting mode
- 4. Use (1) to cycle through the DST settings in the right digital dial in the sequence shown below.



• The Auto DST (AUTO) setting will be available only when a city code that supports time calibration signal reception (page E-21) is selected as the Home City. While Auto DST is selected, the DST setting will be changed automatically in accordance with time calibration signal data.

E-43

F-41

Selecting some city codes automatically makes it possible for the watch to receive the time calibration signal for the corresponding area. See page E-21 for details

To change the Daylight Saving Time (summer time) setting



1. In the Timekeeping Mode, hold down (a) for about two seconds until ADJ appears in the right digital dial. When you release (a), the city code and city name will scroll across the right digital dial. This is the setting mode.


Whenever you enter a setting mode, the analog hands will automatically move to positions that allow easier viewing of the digital dials.


2. Press (C) to enter the DST setting mode.

E-45


 Exiting a setting mode will normally cause the hands to return to regular timekeeping automatically. However, if you manually move the hands (page E-79) and then enter a setting mode, they will not return to regular timekeep automatically when you exit the setting mode. In this case, you will need to return the hands to their normal positions manually (page E-80). keeping

E-47





The following steps explain how to configure timekeeping settings only



E-46

CASIO,

3. When the timekeeping setting you want to change is flashing, use (D) and/or (B) to change it as described below

Screen To do this:		Do this:	
түс:токүс	Change the city code	Use (D) (East) and (B) (West)	
AUTO	Cycle between Auto DST (AUTO), Daylight Saving Time (ON) and Standard Time (OFF)	d Time (OFF)	
12H	Toggle between 12-hour (12H) and 24-hour (24H) timekeeping		
36	Reset the seconds to 00		
(1008)	Change the hour or minute	Use (D) (+) and (B) (-).	
6·30 20 16	Change the year, month, or day		
MUTE	Toggle between button operation tone on (KEY♪) and off (MUTE)		
LT1	Toggle the illumination duration between three seconds (LT3) and 1.5 seconds (LT1)	Press D.	

E-50

E-52

The watch's built-in full automatic calendar makes allowances for different month lengths and leap years. Once you set the date, there should be no reason to change it except after you have the watch's rechargeable battery replaced or after power drops to Level 5 (page E-15).

- The day of the week changes automatically when the date changes.
 Refer to the pages shown below for more information on Timekeeping Mode
- Button operation tone on/off: "To turn the button operation tone on and off" (page E-81)
 Enabling and disabling power saving: "To turn Power Saving on and off" (page E-83)
 The illumination duration: "To change the illumination duration" (page E-69)

4. Press (A) to exit the setting mode.

- The watch automatically adjusts its analog setting to match the current time displayed in the left digital dial.
 Exiting a setting mode will normally cause the hands to return to regular
- timekeeping automatically. However, if you manually move the hands (page E-79) and then enter a setting mode, they will not return to regular timekeeping automatically when you exit the setting mode. In this case, you will need to return the hands to their normal positions manually (page E-80).

Note

- For information about selecting a Home City and configuring the DST setting, see "Configuring Home City Settings" (page E-42).
 While 12-hour format is selected for timekeeping, a PM indicator will appear for times from noon to 11:59 p.m. No indicator appears for times from midnight to 11:59 a.m. With 24-hour format, time is displayed from 0:00 to 23:59, without any "Disinference". **PM** indicator

E-51

Using the World Time Mode

You can use the World Time Mode to view the current time in one of 31 time zones (48 cities) around the globe. The city that is currently selected in the World Time Mode is called the "World Time City".



To enter the World Time Mode Use © to select the World Time Mode as shown on page E-38.

The right digital dial will show **WT** for about one second. After that, the city code and city name will scroll once across the right digital dial, and then the three-letter corresponding city code will be displayed.

To view the time in another time zone In the World Time Mode, use (D) (East) to scroll through city codes.

10:08

36_)

((түс)

E-53

To specify standard time or daylight saving time (DST) for a city



2. Hold down (A) for about two seconds until the watch

beeps.

This toggles the city code you selected in step 1 between Daylight Saving Time (DST indicator displayed in the left digital dial) and standard time (DST indicator not displayed).

 Using the World Time Mode to change the DST setting of the city code that is selected as your Home City also will change the Timekeeping Mode time DST setting.

Note that you cannot switch between standard time/daylight saving time (DST) while UTC is selected as the World Time City.

E-54


Note

If you are using the watch in Japan, be sure to select **TYO** (Tokyo) as your Home City. Selecting another city code will make it impossible to receive the time calibration signal, which will cause the watch's time setting to be off.

The standard time/daylight saving time (DST) setting affects only the currently selected time zone. Other time zones are not affected.

To swap your Home Time and World Time Cities

2. To swap, hold down (A) and (B) at the same time until the watch beeps.



- This will make the World Time City you selected in step 1 (NYC (New York)) your new Home City.
 Your previous Home City (TYO (Tokyo)) will be your new World Time City.
 - E-55

Using the Stopwatch

The stopwatch measures elapsed time, split times, and two finishes.

Min So A /// STW

1/100 second

Use C to select the Stopwatch Mode (STW) as shown on page E-39.

E-57

Note

 The Stopwatch Mode can indicate elapsed time up to 59 minutes, 59.99 seconds. • An ongoing elapsed time measurement operation will continue internally even if you change to another mode. However, if you exit the Stopwatch Mode while a split time is displayed, the split time will not be displayed when you return to the Stopwatch Mode.

To perform an elapsed time operation

\bigcirc \longrightarrow	\bigcirc \longrightarrow	\bigcirc \longrightarrow		A
Start	Stop	Resume	(Stop)	Reset
To pause at a spl	it time			
$\bigcirc \longrightarrow$		A>		A
Start	Split	Split release	Stop	Reset
	(SPL displayed)			

To measure two finishes

D	-> A>	0	> A>	• (A)
Start	Split (SPL displayed) First runner finishes Display time of first runner		Split release Display time of second runner.	Reset

To enter the Stopwatch Mode

B //_D O

CASIO,

Using the Countdown Timer

The countdown timer can be set within a range of one minute to 100 minutes. An alarm sounds when the countdown reaches zero.



To enter the Countdown Timer Mode Use © to select the Countdown Timer Mode (TMR) as shown on page E-39.

- To specify the countdown start time 1. Enter the Countdown Timer Mode. If a controlown is in progress (indicated by the seconds counting down in the left digital dial), press (D) to stop it and then press (A) to reset to the current countdown start time.
 - If a countdown is paused, press (A) to reset to the current countdown start time

F-60

To perform a countdown timer operation

B

0				A
Start	Stop	Resume	(Stop)	Reset
 Before st 	tarting a countdow	n timer operation, che	eck to make sure	that a

Betore starting a countdown timer operation, check to make sure that a countdown operation is not in progress (indicated by the seconds counting down).
If it is, press () to stop it and then (a) to reset to the countdown start time.
An alarm sounds for 10 seconds when the end of the countdown is reached. This alarm will sound in all modes. The countdown time is reset to its starting value automatically when the alarm sounds.


To stop the alarm Press any button.

E-62

To set an alarm time Alarm ON/OFF indicator

t

1. In the Alarm Mode, use (D) to scroll through the alarm indicators (AL1 to AL5, SIG) in the right digital dial until the one whose time you want to set is displayed.



- 2. Hold down (A) for about two seconds until the alarm time starts to flash. This is the setting mode. Whenever you enter the setting mode, the analog hands will automatically move to positions that allow easier viewing of the digital dials.
- 3. Press (C) to move the flashing between the hour and minute settings

F-64

0

To turn an alarm and the Hourly Time Signal on and off

1. In the Alarm Mode, use (1) to scroll through the alarm indicators (AL1 to AL5, SIG) in the right digital dial until Hourly Time Signal the one you want is displayed. :00 (SIG on ന

To stop the alarm Press any button

 When the alarm or the Hourly Time Signal you want is selected, press (a) to toggle it between on and off.
 The alarm on indicator (when any alarm is on) and the Hourly Time Signal on indicator (when the Hourly Time Signal is on) are displayed in all modes.

2. Hold down (A) until the minute setting of the current countdown start time starts

- Whenever you enter a setting mode, the analog hands will automatically move to positions that allow easier viewing of the digital dials.
- 3. Press C to move the flashing between the minute and second settings 4. Use (D) (+) and (B) (-) to change the flashing item
- To set the starting value of the countdown time to 100 minutes, set 00'00".
- 5. Press (a) to exit the setting mode.
 5. Press (a) to exit the setting mode.
 6. Exiting a setting mode will normally cause the hands to return to regular timekeeping automatically. However, if you manually move the hands (page E-79) and then enter a setting mode, they will not return to regular timekeeping automatically when you exit the setting mode. In this case, you will need to return the hands to their normal positions manually (page E-80).

F-61

Using the Alarm



You can set five independent daily alarms. When a daily alarm is turned on, an alarm tone will sound for about 10 seconds each day when the time in the Timekeeping Mode reaches the preset alarm time. This is true even if the watch is not in the Timekeeping Mode. You can also turn on an Hourly Time Signal, which will cause the watch to beep twice every hour on the hour.

To enter the Alarm Mode

Use © to select the Alarm Mode as shown on page E-39. The right digital dial will show ALM for about one second and then the indictor for the currently selected

When you enter the Alarm Mode, the data you were viewing when you last exited the mode appears first.

E-63

- 4. While a setting is flashing, use D (+) and B (–) to change it
 - When setting the alarm time using the 12-hour format, take care to set the time correctly as a.m. (no indicator) or p.m. (PM indicator).
- 5. Press (A) to exit the setting mode.

 Exiting a setting mode will normally cause the hands to return to regular Earling a setting nuclear win inclusive cause internations of earlier to regular to regular timekeeping automatically. However, if you manually move the hands (page E-79) and then enter a setting mode, they will not return to regular timekeep automatically when you exit the setting mode. In this case, you will need to return the hands to their normal positions manually (page E-80). eping

To test the alarm In the Alarm Mode, hold down (1) to sound the alarm.

Note

E-65

Alarm Countdown



Alarm ON/OFF indicato

When the current time reaches one hour before an alarm time setting, the alarm on/off indicator (in the lower digital dial) will flash and a countdown of the final 60 minutes will be displayed in the right digital dial while the watch is in the Timekeeping Mode.

 Pressing (A) while an alarm countdown is in progress will display the day of the week in the right digital dial for about two seconds. After that, the dial will return to the countdown.

- When you enter the Timekeeping Mode from another mode while an alarm countdown is in progress, the day of the week will appear in the right digital dial for two seconds. After that, the countdown will appear.
 If an alarm countdown for another alarm starts while a previous alarm countdown is already in progress, it will be displayed after the ongoing countdown reaches zero
- and its alarm sounds.

E-67

Illumination

E-66



The face of the watch is illuminated for easy reading in the dark The watch's auto light switch turns on illumination

automatically when you angle the watch towards your face

. The auto light switch must be turned on (page E-72) for it to operate

To turn on illumination manually

 You can use the procedure below to select either
 1.5 seconds or three seconds as the illumination duration. When you press (B), the face will remain illuminated for about 1.5 seconds or three seconds depending on the current illumination duration setting.

. The above operation turns on illumination regardless of the current auto light switch settina

Illumination is disabled during time calibration signal reception.

To change the illumination duration

- To change the illumination duration 1. In the Timekeeping Mode, hold down (A) for about two seconds until ADJ appears in the right digital dial. When you release (A), the city code and city name will scroll across the right digital dial. This is the setting mode. Whenever you enter a setting mode, the analog hands will automatically move to positions that allow easier viewing of the digital dials.
- Use
 C
 to cycle through the settings in the right digital dial until the current
 illumination duration (LT1 or LT3) is shown.
- See the sequence in step 2 of the procedure under "To change the current time and date settings manually" (page E-48) for information about how to scroll through setting mode

F-69

CASIO,

- 3. Press (D) to toggle the illumination duration between three seconds (LT3 displayed) and 1.5 seconds (LT1 displayed).
- 4. After all of the settings are the way you want, press (a) to exit the setting mode. Exiting a setting mode will normally cause the hands to return to regular timekeeping automatically. However, if you manually move the hands (page E-79) and then enter a setting mode, they will not return to regular timekeeping automatically when you exit the setting mode. In this case, you will need to return the hands to their normal positions manually (page E-80).

About the Auto Light Switch

Turning on the auto light switch auses illumination to turn on, whenever you position your wrist as described below in any mode. Moving the watch to a position that is parallel to the ground and then tilting it towards you more than 40 degrees causes illumination to turn on.



F-70

The auto light switch is always disabled, regardless of its on/off setting, when any one of the following conditions exists.
 While an alarm is sounding
 While a receive operation is in progress

To turn the auto light switch on and off



In the Timekeeping Mode, hold down (B) for about three seconds to toggle the auto light switch on (indicator displayed in the right digital dial) and off (indicator not displayed).

- The auto light switch on indicator appears in all modes while the auto light switch is turned on.
 The auto light switch turns off automatically whenever battery power drops to Level 4 (page E-15).
- Auto light switch or indicator

E-72



- Illumination may not turn on if the face of the watch is more than
- Illumination may not turn on if the face of the watch is more than 15 degrees above or below parallel. Make sure that the back of your hand is parallel to the ground. Make sure that the back of your hand is parallel to the ground. Illumination duration (page E-69), even if you keep the watch pointed towards your face. Static electricity or magnetic force can interfere with proper operation of the auto light switch. If illumination does not turn on, try moving the watch back to the starting position (parallel with the ground) and then thit it back towards your face again. If this does not work, forop your arm all the way down so it hangs at your side, and then bring it back up again.
- You may notice a very faint clicking sound coming from the watch when it is shaken back and forth. This sound is caused by mechanical operation of the auto light switch, and does not indicate a problem with the watch.

E-74

- The watch will return to regular timekeeping automatically if you do not perform any operation for about two or three minutes. Any changes you have made to settings up to that point will be saved.
 If the hour and minute hands are all at 12 o'clock, which is their home position, jump to step 3.
- 2. Use (D) (+) and (B) (-) to adjust the hour and minute hand positions.
- Use (D) (+) and (B) (-) to adjust the nour and minute nand positions. Holding down either button will cause the hand to move at high speed. Once started, high-speed hand movement will continue even if you release the button. To stop high-speed hand movement, press any button. High-speed hand movement started with the (D) (+) button will stop automatically after 12 revolutions of the minute hand. If started with the (B) (-)
- button, it will stop after one revolution of the minute hand.
- 3. Press (A) to exit home position correction and return to regular timekeeping.

Moving the Hands for Easy Viewing of the Digital Dials

You can use the procedure below to move the analog hands in order to better view a digital dial

- . The analog hands will not move while battery power is low.
- Time calibration signal reception is disabled while the hands are in positions to allow easier viewing of the digital dials (page E-79).

Warning!

- •Always make sure you are in a safe place whenever you are reading the face of the watch using the auto light switch. Be especially careful when running or engaged in any other activity that can result in accident or injury. Also take care that sudden illumination by the auto light switch does not startle or distract others around you.
- When you are wearing the watch, make sure that its auto light switch is turned off before riding on a bicycle or operating a motorcycle or any other motor vehicle. Sudden and unintended operation of the auto light switch can create a distraction, which can result in a traffic accident and serious personal injury.

Note

This watch features a "LED", so the auto light switch operates only when available light is below a certain level. It does not illuminate the face under bright light.

Illumination Precautions

- . LED panel that provides illumination loses power after very long use.
- Illumination may be hard to see when viewed under direct sunlight.
- Illumination turns off automatically whenever an alarm sounds.
 Frequent use of illumination runs down the battery.

Auto light switch precautions

- . Wearing the watch on the inside of your wrist, movement of your arm, or vibration of your arm can cause frequent activation of the auto light switch and illumination
- of you and car cause request activation the battery, turn off the auto right switch and minimized of the face. To avoid running down the battery, turn off the auto light switch and whenever engaging in activities that might cause frequent illumination of the face. Note that wearing the watch under your sleeve while the auto light switch is turned on can cause frequent illumination of the face and can run down the battery.

E-73

F-71

Hand Home Position Adjustment

Strong magnetism or impact can cause the hands of the watch to be off, even if the watch is able to perform the signal receive operation.

Home position adjustment is not necessary when the analog time and digital time are the same time in the Timekeeping Mode.

- To adjust home positions manually
 1. In the Timekeeping Mode, hold down (A) and keep it depressed for about five seconds until H.SET appears in the right digital dial.
- . The hour and minute hands should all move to 12 o'clock, which is their home
- The four and finite names should an more to the electronic strength of the position. Though **ADJ** will appear in the right digital dial about two seconds after you hold down (**(a)**, do not release the button yet. Keep it depressed until **H.SET** appears. When **H.SET** appears in the right digital dial, release the (**(a)** button. This will cause the hour and minute hands to move to 12 o'clock.

E-75


Note

After performing home position adjustment, enter the Timekeeping Mode and check to make sure that the analog hands and the digital dial indicate the same time. If they do not, perform home position adjustment again.



To move the hands to view a digital dial

Hold down \bigcirc for about two seconds until **HAND** appears. Releasing \bigcirc will cause the HANDS indicator to flash and the hands will move away from the digital dial.



E-76

CASIO,

To return the hands to their normal positions Hold down (C) for about two seconds until HAND appears.

Note

F-80

Note

E-82

turned off

settings.

- The hands will also return to their normal positions if you do not perform any
- The hands also will move away from the digital dial automatically whenever you enter a setting mode in the Timekeeping Mode, Timer Mode, or Alarm Mode.

Use () to cycle through settings in the right digital dial until the current button operation tone (MUTE or KEY) is displayed.

4. After all of the settings are the way you want, press (A) to exit the setting mode. After all of the setting size the way you want, press & to exit the setting index Exiting a setting mode will normally cause the hands to return to regular timekeeping automatically. However, if you manually move the hands (page E-79) and then enter a setting mode, they will not return to regular timekeeping automatically when you exit the setting mode. In this case, you will need to return the hands to their normal positions manually (page E-80).

• The mute indicator is displayed in all modes when the button operation tone is

4. After all of settings are the way you want, press (A) to exit the setting mode.

After all of settings are the way you want, press (a) to exit the setting mode. Exiting a setting mode will normally cause the hands to return to regular timekeeping automatically. However, if you manually move the hands (page E-79) and then enter a setting mode, they will not return to regular timekeeping automatically when you exit the setting mode. In this case, you will need to return the hands to their normal positions manually (page E-80).

3. Press () to toggle the button operation tone on (KEY) and off (MUTE).

See the sequence in step 2 of the procedure under "To change the current time and date settings manually" (page E-48) for information about how to scroll between artitione

Time calibration signal reception is disabled while the hands are in positions to allow easier viewing of the digital dials (page E-79).
 Hold down (©) for about four seconds to return the hands to their normal positions and switch to the Timekeeping Mode.

Other Settings

The button operation tone sounds any time you press one of the watch's buttons You can turn the button operation tone on or off as desired.

Even if you turn off the button operation tone, the alarm, Hourly Time Signal, and Countdown Timer Mode alarm all operate normally.

To turn the button operation tone on and off



In the Timekeeping Mode, hold down (A) for about two seconds until ADJ appears in the right digital dial. When you release (A), the city code and city name will scroll across the right digital dial. This is the setting

 Whenever you enter a setting mode, the analog hands will automatically move to positions that allow easier viewing of the digital dials

F-81

To turn Power Saving on and off



 In the Timekeeping Mode, hold down (a) for about two seconds until ADJ appears in the right digital dial. When you release (a), the city code and city name will scroll across the right digital dial. This is the setting mode

Whenever you enter a setting mode, the analog hands
 will automatically move to positions that allow easier
 viewing of the digital dials.

- Use (c) to cycle through the settings in the right digital dial unit the current power saving setting (PSON or PSOF) is displayed.
 See the sequence in step 2 of the procedure under "To change the current time and date settings manually" (page E-48) for information about how to scroll between
 - settings.
- 3. Press (1) to toggle Power Saving on (PSON) and off (PSOF).

E-83

Troubleshooting

Time Setting

See "Radio Controlled Atomic Timekeeping" (page E-21) for information about adjusting the time setting according to a time calibration signal.

The current time setting is off by hours.

Your Home City setting may be wrong (page E-42). Check your Home City setting and correct it, if necessary.

The current time setting is off by one hour.

The current time setting is off by one hour.
If you are using the watch in an area where time calibration signal reception is possible, see "To configure Home City settings" (page E-42).
If you are using in the watch in an area where time calibration signal reception is not possible, you may need to change your Home City's standard time/daylight saving time (DST) setting manually. Use the procedure under "To change the current time and date settings manually" (page E-48) to change the standard time/daylight saving time (DST) setting.

E-85

The hands are off.

E-84

This could indicate that the watch has been exposed to magnetism or strong impact, which has caused problems with proper hand alignment. Adjust the watch's hand home position alignment (page E-75).

■ The analog hands are not indicating the correct time. If the HANDS indicator is displayed on the right digital dial, it means that the analog hands have been moved for easier viewing of the digital dials. Hold down © for about four seconds to return to the Timekeeping Mode.

World Time Mode

The time for my World Time City is off in the World Time Mode. This could be due to incorrect switching between standard time and daylight saving time. See "To specify standard time or daylight saving time (DST) for a city" (page E-54) for more information.

The watch can't receive a time calibration signal. The RCVD indicator does not appear

Possible Cause	Remedy	Page
 You are wearing or moving the watch, or performing a button operation during the signal receive operation. The watch is in an area with poor reception conditions. 	Keep the watch in an area where reception conditions are good while the signal receive operation is being performed.	E-26
You are in an area where signal reception is not possible for some reason.	See "Approximate Reception Ranges".	E-23
The calibration signal is not being transmitted for some reason.	Check the website of the organization that maintains the time calibration signal in your area for information about its down times. Try again later.	-

Charging

The watch does not resume operation after I expose it to light.

This can happen after the power level drops to Level 5 (page E-15). Continue exposing the watch to light until the battery power indicator shows H or M.

Time Calibration Signal

The information in this section applies only when LIS, LON, MAD, PAR, ROM, BER, STO, ATH, MOW, HKG, BJS, HNL, ANC, YVR, LAX, YEA, DEN, MEX, CHI, NYC, YHZ, YYT, SEL, or TYO is selected at the Home City. You need to adjust the current time manually when any other city is selected as the Home City.

The current time setting changes after I set it manually.

You may have the watch configured for Auto Receive of the time calibration signal (page E-28), which will cause the time to be adjusted automatically according to your currently selected Home Citly. If this results in the wrong time setting, check your Home Citly setting and correct it, if necessary (page E-42).

The current time setting is off by one hour.

Possible Cause	Remedy	Page
Signal reception on a day for switching between standard time/daylight saving time (DST) may have failed for some reason.	Perform the operation under "To get ready for a receive operation". The time setting will be adjusted automatically as soon as signal reception is successful.	E-26
	If you are unable to receive the time calibration signal, change the standard time/daylight saving time (DST) setting manually.	E-45



CASIO

Possible Cause	Remedy	Page	
The watch is not in the Timekeeping Mode or World Time Mode, a countdown timer operation is in progress, or the hands have been moved to a position to allow easier viewing of the digital dials.	Auto receive is performed only while the watch is in the Timekeeping Mode or World Time Mode. Switch to either of these two modes. If a countdown timer operation is progress, stop it. If the hands have been moved for easier viewing, return them to their normal positions.	E-38	
Auto Receive is disabled.	Enable Auto Receive.	E-34	
Your Home City setting is wrong.	Check your Home City setting and correct it, if necessary.	E-42	
There is not enough power for signal reception.	Expose the watch to light to charge it.	E-12	

F-90

Specifications

Accuracy at normal temperature: ±15 seconds a month (with no signal calibration)

- calibration)
 Timekeeping: Hour, minutes, seconds, p.m. (PM), year, month, day, day of the
 week, alarm countdown
 Time format: 12-hour and 24-hour
 Calendar system: Full Auto-calendar pre-programmed from the year 2000 to
 2099
 Other: Home Citly code (can be assigned one of 48 city codes); Standard Time/
 Daylight Saving Time (summer time)
 Time Calibration Signal Reception: Auto receive 6 times a day for
 the Chinese calibration signal); Remaining auto receives cancelled as soon as
 one is successful; Manual receive

E-92

Alarms: 5 Daily alarms; Hourly Time Signal

Illumination: LED; Selectable illumination duration

- Other: Battery power indicator; Power Saving; Button operation tone on/off Power Supply: Solar panel and one rechargeable battery Approximate battery operating time: 7 months (from full charge to Level 4) under Watch not exposed to light
 Internal timekeeping
- Display on 18 hours per day, sleep state 6 hours per day
 1 illumination operation (1.5 seconds) per day
 10 seconds of alarm operation per day

- 4 minutes of signal reception per day
 1 hand movement for easy viewing of the digital dials per day Frequent use of illumination runs down the battery.

Specifications are subject to change without notice.

E-94

City Code Table

City Code	City	UTC Offset/ GMT Differential	City Code	City	UTC Offset/ GMT Differential
PPG	Pago Pago	-11	RAI	Praia	-1
HNL	Honolulu	-10	UTC		
ANC	Anchorage	-9	LIS	Lisbon	0
YVR	Vancouver	-8	LON	London	
LAX	Los Angeles	-0	MAD	Madrid	
YEA	Edmonton	-7	PAR	Paris	
DEN	Denver	=/	ROM	Rome	+1
MEX	Mexico City	-6	BER	Berlin	
CHI	Chicago	-0	STO	Stockholm	
NYC	New York	-5	ATH	Athens	
SCL	Santiago	-4	CAI	Cairo	+2
YHZ	Halifax	-4	JRS	Jerusalem	
YYT	St. Johns	-3.5	MOW	Moscow	+3
RIO	Rio De Janeiro	-3	JED	Jeddah	+3
FEN	Fernando De Noronha	-2	THR	Tehran	+3.5

City Code	City	UTC Offset/ GMT Differential
DXB	Dubai	+4
KBL	Kabul	+4.5
KHI	Karachi	+5
DEL	Delhi	+5.5
KTM	Kathmandu	+5.75
DAC	Dhaka	+6
RGN	Yangon	+6.5
BKK	Bangkok	+7
SIN	Singapore	
HKG	Hong Kong	+8
BJS	Beijing	+0
TPE	Taipei	
SEL	Seoul	+9
TYO	Tokyo	+9
ADL	Adelaide	+9.5

City	City	UTC Offset/
Code	City	GMT Differential
	Guam	+10
SYD	Sydney	+10
NOU	Noumea	+11
WLG	Wellington	+12

This table shows the city codes of this watch. (As of July 2016)
 The rules governing global times (UTC offset and GMT differential) and summer time are determined by each individual country.

L-3

Signal reception is being performed successfully, but the time and/or day

is wrong.			
Possible Cause	•	Remedy	Page
Your Home City	setting is wrong.	Check your Home City setting and correct it, if necessary.	E-42
The DST setting	may be incorrect.	Change the DST setting to Auto DST.	E-42

E-91

Receivable Time Calibration Signals: Mainflingen, Germany (Call Sign: DCF77, Frequency: 77.5 kHz); Anthorn, England (Call Sign: MSF, Frequency: 60.0 kHz); Fort Collins, Colorado, the United States (Call Sign: WWVB, Frequency: 60.0 kHz); Fukushima, Japan (Call Sign: JVY, Frequency: 40.0 kHz); Fukuoka/Saga, Japan (Call Sign: JJY, Frequency: 60.0 kHz); Shangqiu City, Henan Province, China (Call Sign: BPC, Frequency: 68.5 kHz)
 World Time: 48 cities (31 time zones) Other: Daylight Saving Time/Standard Time

Stopwatch Measuring unit: 1/100 second Measuring modes: Elapsed time, split time, two finishes

Countdown Timer: Measuring unit: 1 second Countdown range: 100 minutes Countdown start time setting range: 1 to 100 minutes (1-second increments)

E-93

