


Operation Guide 5667

CASIO®

- Your watch may differ somewhat from the one shown in the illustration.

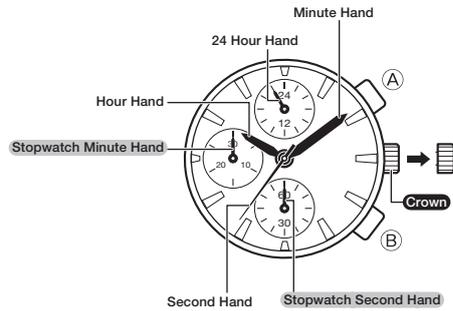

To adjust the time setting

When the second hand is at 12 o'clock, pull the **Crown** out.

Rotate the **Crown** to change the time setting.


Push the **Crown** back in on a time signal to resume timekeeping.

Note

- Take care that you set the correct AM or PM time.
- When changing the time, move the minute hand four or five minutes past your final setting, and then back it up to the setting you want.


Crown Operations

Some water-resistant models (10BAR, 20BAR) have a screw-in crown. When you need to perform a crown operation, rotate it towards you to unscrew it. Then pull the crown out. Avoid applying undue force when pulling. The watch loses its water resistance while the crown is unscrewed. After performing a crown operation, fully screw the crown back in.



If your watch has a rotary bezel...

You can rotate the bezel to align its ▼ mark with the minute hand. Then you will be able to tell how much time has elapsed since aligning the ▼ mark.



Using the Stopwatch

The stopwatch measures elapsed time in 1-second increments up to 29 minutes, 59 seconds.

Elapsed time



Important!

- Do not operate the stopwatch with the crown pulled out.

Note

- An elapsed time operation will stop automatically at the end of 30 minutes.

Correcting the 0 Positions of the Hands

Perform the following procedure if the stopwatch hands do not return to their 0 (zero) positions when you reset the stopwatch.

Pull the **Crown** out.

Use (A) (clockwise) and (B) (counterclockwise) to move the stopwatch hands to 0 position.

- The (Stopwatch Minute Hand) is synchronized with the (Stopwatch Second Hand).
- Holding down (A) or (B) will move the hands at high speed.

After all of the hands are the way you want, push the **Crown** back in.

Important!

- Timekeeping stops while the crown is pulled out. Correct the current time setting after performing the above operation.

Specifications

Accuracy at normal temperature: ±20 seconds a month

Stopwatch: Measuring Capacity: 29'59" (30 minutes)
Measuring Unit: 1 second
Measurements: Elapsed time

Battery: One silver oxide battery (Type: SR621SW)

Battery Life: Approximately 2 years

Specifications are subject to change without notice.