


Operation Guide HS-50W

ILLUSTRATION

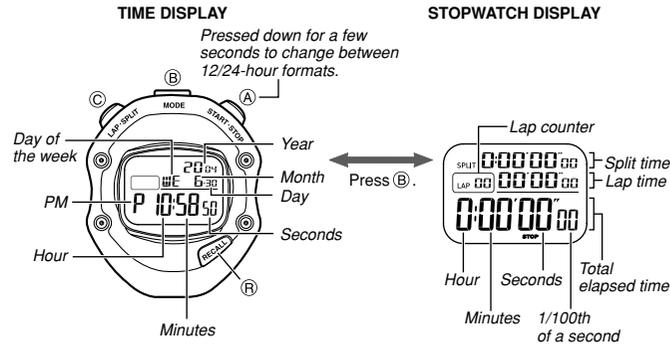


- A sticker is affixed to the glass of this stopwatch when you purchase it. Be sure to remove the sticker before using the stopwatch.
- Depending on the stopwatch model, the configuration of your stopwatch may differ somewhat from that shown in the illustration.

GENERAL GUIDE

Every time the **B** button is pressed, the display is switched between TIME and STOPWATCH displays.

- A** button Starts and stops timing.
- B** button Toggles between the current time and stopwatch screens.
- C** button Registers a lap/split time.
- R** button Recalls lap/split time records and total elapsed time.

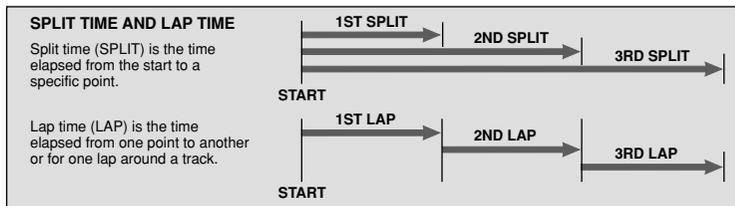

USING THE STOPWATCH

A signal confirms **A** and **C** button operations.

Working range

The total elapsed time and split time display is limited to 9 hours 59 minutes 59.99 seconds. Lap time display is limited to 59 minutes 59.99 seconds. Thereafter it will be reset and started again. The lap counter starts from 1 to 99 and repeats from 0.

NORMAL TIME

	START	STOP	RESET
CHART	0	(a)	
BUTTON OPERATION	A	A	C
DISPLAY			

NET TIME

	START	STOP	START	STOP	RESET
CHART	0	(a)	(a)	(a + b)	
BUTTON OPERATION	A	A	A	A	C
DISPLAY					

After stopping a net time operation by pressing **A**, you can resume it by pressing **A** again.

Operation Guide HS-50W

CASIO®

LAP/SPLIT TIMES

A maximum of 9 lap/split time records and total elapsed time are automatically stored into the memory, and recalled by pressing the (R) button.
Once 9 lap/split time records are stored (counter shows a flashing value greater than 9), pressing (C) displays the current lap/split time, but does not store it in memory.

	START	1ST LAP	2ND LAP	3RD LAP	STOP	RESET
CHART	0	a	(a) b	(a+b) c	(a+b+c) (t)	
		1ST SPLIT (a)	2ND SPLIT (a+b)	3RD SPLIT (a+b+c)		
BUTTON OPERATION	(A)	(C)	(C)	(C)	(A)	(C)
DISPLAY						

Recording the Finishing Times of Multiple Runners

After pressing (A) to start timing, press (C) as each runner crosses the finish line. This records each of the finishing times in memory, which you can recall by pressing the (R) button.

*Recorded times are retained in memory until you start a new net time operation (by pressing (A)) after clearing the stopwatch screen to all zeros (by pressing (C)).


Example : To record the times of 10 different runners.

	START	1ST RUNNER FINISHES	2ND RUNNER FINISHES	9TH RUNNER FINISHES	10TH RUNNER FINISHES
CHART					
BUTTON OPERATION	(A)	(C)	(C)	(C)	(A)
DISPLAY	You can scroll through time records in memory by pressing (R), even while the stopwatch is still running.				
		Runner's record	Difference between this runner's record and the previous runner's record	Runner's finishing position	

SETTING TIME AND DATE



- 1) Press (C) for a few seconds in TIME display to set time and date.
- 2) Press (A) on a time signal to correct seconds.
- 3) Press (C) shift flashing digit (s). Digit(s) to be changed will flash.



- 4) Each press of (A) increments digit. Keep pressed to move quickly.
 - 5) Press (B) or (C) to complete setting.
- *Year digits can be set up to the year 2029.

AUTO-retrieve function

Display automatically returns to TIME if left unused for a few minutes.