

User's Guide 3263

Congratulations upon your selection of this CASIO watch.

Important!

- This manual provides a brief overview of your watch.

E-1


For a full Operation Guide and Q&A information about this product, go to the website below.
<http://world.casio.com/manual/wat/>



Configuring Home City, Time and Date Settings

- Configure Home City and summer time settings first. After that, configure time and date settings.
1. In the Timekeeping Mode, use **(D)** to display the current Home City Time (T-1) screen.
 2. Hold down **(A)** until the seconds start to flash, which indicates the setting screen.
 3. Press **(C)** to move the flashing in the sequence shown below to select a setting.

E-2

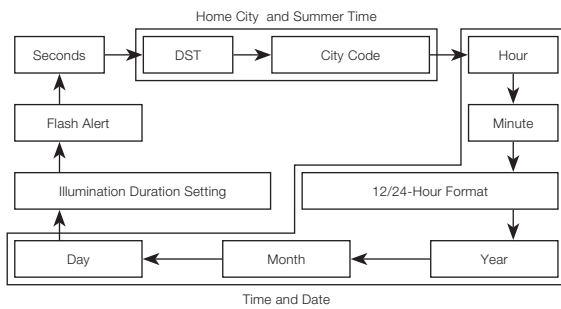

E-3

4. Use **(D)** and **(B)** to change the selected setting.

Screen	To do this:	Do this:
50	Reset the seconds to 00.	
0 FF DST	Toggle between Daylight Saving Time (00) and Standard Time (0 FF).	Press (D) .
T Y C	Change the city code.	Use (D) (east) and (B) (west).
H M	Change the hour or minutes.	Use (D) (+) and (B) (-).
12H 24H	Toggle between 12-hour (12H) and 24-hour (24H) timekeeping.	Press (D) .
Y M	Change the year.	
D M	Change the month or day.	Use (D) (+) and (B) (-).


5. Press **(A)** to exit the setting screen.

E-4

E-5

Mode Selection and Operations

- Press **(C)** to change the mode.

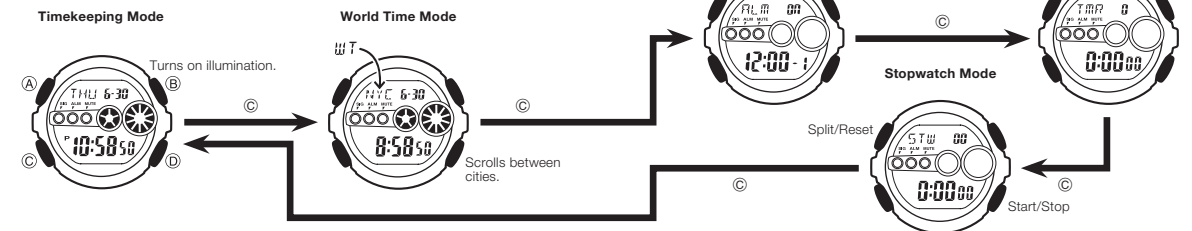

E-6

E-7

Specifications

Accuracy at normal temperature: ±15 seconds a month

Timekeeping: Hour, minutes, seconds, p.m. (P), month, day, day of the week
 Time format: 12-hour and 24-hour
 Calendar system: Full Auto-calendar pre-programmed from the year 2000 to 2099
 Other: Multi Time (one Home City Time and three Local Times); Daylight Saving Time (summer time)/Standard Time

World Time: 48 cities (31 time zones) and Coordinated Universal Time
 Other: Standard Time/Daylight Saving Time (summer time); Home Time City/World Time City swapping

Alarms: 5 alarms (One-time or Daily), Hourly Time Signal

Countdown Timer
 Measuring unit: 1/10 second
 Input range: 1 second to 24 hours (1-second increments, 1-minute increments and 1-hour increments)

E-8

Stopwatch

Measuring unit: 1/100 second
 Measuring capacity: 23:59'59.99"
 Measuring modes: Elapsed time, split time, two finishes

Illumination: LED (light-emitting diode); Selectable illumination duration

Other: Button operation tone on/off; Auto Light Switch; Flash alert

Battery: One lithium battery (Type: CR2025)
 Approximately 7 years on type CR2025; 20 seconds of alarm operation (with flash alert), 1.5 seconds of illumination per day

Specifications are subject to change without notice.

E-9



City Code Table



L-1

City Code Table

City Code	City	UTC Offset/ GMT Differential
PPG	Pago Pago	-11
HNL	Honolulu	-10
ANC	Anchorage	-9
YVR	Vancouver	-8
LAX	Los Angeles	-8
YEA	Edmonton	-7
DEN	Denver	-7
MEX	Mexico City	-6
CHI	Chicago	-6
NYC	New York	-5
SCL	Santiago	-4
YHZ	Halifax	-4
YYT	St. Johns	-3.5
RIO	Rio De Janeiro	-3

City Code	City	UTC Offset/ GMT Differential
FEN	Fernando de Noronha	-2
RAI	Praia	-1
UTC		
LIS	Lisbon	0
LON	London	0
MAD	Madrid	0
PAR	Paris	0
ROM	Rome	+1
BER	Berlin	+1
STO	Stockholm	+1
ATH	Athens	+1
CAI	Cairo	+2
JRS	Jerusalem	+2

City Code	City	UTC Offset/ GMT Differential
MOW	Moscow	+3
JED	Jeddah	+3
THR	Tehran	+3.5
DXB	Dubai	+4
KBL	Kabul	+4.5
KHI	Karachi	+5
DEL	Delhi	+5.5
KTM	Kathmandu	+5.75
DAC	Dhaka	+6
RGN	Yangon	+6.5
BKK	Bangkok	+7
SIN	Singapore	+7
HKG	Hong Kong	+8
BJS	Beijing	+8
TPE	Taipei	+8

City Code	City	UTC Offset/ GMT Differential
SEL	Seoul	+9
TYO	Tokyo	+9
ADL	Adelaide	+9.5
GUM	Guam	+10
SYD	Sydney	+10
NOU	Noumea	+11
WLG	Wellington	+12

- Based on data as of December 2009.
- The rules governing global times (UTC offset and GMT differential) and summer time are determined by each individual country.

L-2

L-3