

# Quick Reference Manual 5519



Congratulations upon your selection of this CASIO watch.

Bluetooth® is a registered trademark or trademark of Bluetooth SIG, Inc. of the United States.

Your watch has a Mobile Link function that allows it to communicate with a Bluetooth® mobile phone and adjust its time settings to match those of the mobile phone.

- This product complies with or has received approval under radio laws in various countries and geographic areas. Use of this product in an area where it does not conform to or where it has not been approved under applicable radio laws may be punishable under local laws. For details, visit <http://world.casio.com/ce/BLE/>.
- Use of this product inside of an aircraft is restricted by the aviation laws of each country. Be sure to obey instructions provided by flight personnel concerning use of devices such as this product.

For details about functions, go to the website below and select your language for the EQB-501.  
<http://support.casio.com/wat/bs/>



## Using the Watch

### Charging

**Remove the watch from your wrist and place it in a brightly lit area.**

- The watch may become hot when exposed to light for charging. Take care to avoid burn injury.
- Avoid charging in locations where it is very hot.


### Power Saving

- Leaving the watch in a dark location for about one hour between the hours of 10 p.m. and 6 a.m. will cause the second hand to stop at 12 o'clock.
- Leaving the watch in a dark location for about one week will cause all hands to stop at 12 o'clock.

### Battery Alerts

- Low Battery  
Second hand jumps every two seconds (Low Battery Alert).
- Dead Battery  
All hands stopped at 12 o'clock.

### General Guide

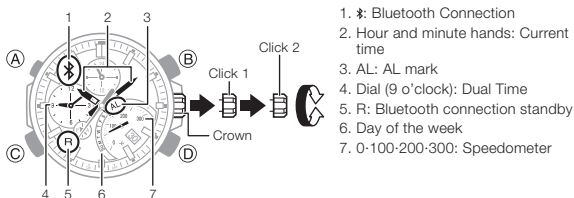


1. Bluetooth Connection
2. Hour and minute hands: Current time
3. AL: AL mark
4. Dial (9 o'clock): Dual Time
5. R: Bluetooth connection standby
6. Day of the week
7. 0-100-200-300: Speedometer

\* Hold down © for about 1.5 seconds to connect via Bluetooth.

### Setting the Time

1. Rotate the crown towards you to loosen it.
2. Pull the crown out to the second click.
  - This enables setting of the hour and minute.
3. Rotate the crown to change the current hour and minute setting.
4. Press (A).
  - This enables the month and day setting.
5. Use (B) to change the month setting.
6. Rotate the crown to change the day setting.



7. Press (A).
  - This enables the year 10's digit setting.
8. Rotate the crown to change the year 10's digit setting.



9. Press (A).
  - This enables the year 1's digit setting.
10. Rotate the crown to change the year 1's digit setting.
11. After the settings are the way you want, push the crown back in and then screw it securely into place.



### Changing the Dual Time Setting

1. Rotate the crown towards you to loosen it.
2. Pull the crown out to the first click.
3. Rotate the crown to move the hands to the time you want to set.
4. After the setting is the way you want, push the crown back in and then screw it securely into place.



## Specifications

Accuracy at normal : ±15 seconds a month  
 temperature

Timekeeping : Hour, minute (hands move at 10-second intervals), second; 24-hour timekeeping, date, day of the week  
 Calendar system: Full-auto calendar from 2000 to 2099  
 Others: Dual time (hour, minute; 24-hour timekeeping; Swapping with Home Time)

Stopwatch : Measuring unit: 1 second  
 Measuring capacity: 23:59'59" (24 hours)  
 Measurement functions: Elapsed time, split times  
 Speed Display: 0 to 300 units/hour

Alarm : Setting units: Hour, minute  
 Beeper: 10 seconds

Mobile Link Functions : Auto Time Correction  
 Time setting adjusted automatically at preset time.  
 Auto summer time switching  
 Automatic switching between standard time and summer time.  
 Mail checking  
 Check for incoming mail from the watch  
 Phone finder  
 Watch operation sounds the alert sound of the mobile phone.  
 Stopwatch data transfer  
 Lap/Split time display measured in 1/1000 second for up to 100 entries  
 Hand position correction  
 Data Communication Specifications  
 Bluetooth®  
 Frequency Band: 2440MHz-2480MHz  
 Maximum Transmission: 0 dBm (1 mW)  
 Communication range: 2 meters max. (depends on environment)

Other : Power Saving; Low battery alert; Airplane Mode (disables data communication)

Power Supply : Solar panel and one rechargeable battery

Approximate Battery Life : 8 months  
 Conditions  
 • Mobile Link: 4 times (40 seconds)/day  
 • Alarm: Once (10 seconds)/day  
 • Power Saving: 6 hours/day