


# Operation Guide 5567

CASIO®

- Your watch may differ somewhat from the one shown in the illustration.

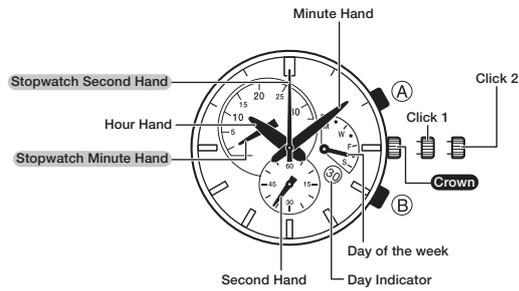

Stopwatch functions

## To adjust the time setting

When the second hand is at 12 o'clock, pull the **Crown** out to Click 2.

Rotate the **Crown** to change the time setting.

Push the **Crown** back in on a time signal to resume timekeeping.

### Note

- Take care that you set the correct AM or PM time.
- When changing the time, move the minute hand four or five minutes past your final setting, and then back it up to the setting you want.

## To change the day indicator setting

Pull the **Crown** out to Click 1.

Rotate the **Crown** away from you to set the day.

Push the **Crown** back in.

### Note

- The day indicator setting uses a 31-day month. Make adjustments for months of shorter lengths.
- Avoid changing the day indicator setting between the hours of 9:00 p.m. and 1:00 a.m. Otherwise, the day indicator may not change correctly at midnight.

## To change the day of the week

Pull the **Crown** out to Click 1.

Rotate the **Crown** towards you to set the day of the week.


Push the **Crown** back in.

### Note

- Avoid changing the day of the week setting between the hours of 11:00 p.m. and 2:00 a.m.
- The day of the week will change when the current time is between 1:00 a.m. and 3:00 a.m.


## Crown Operations

Some water-resistant models (100 meters, 200 meters) have a screw-in crown. When you need to perform a crown operation, rotate it towards you to unscrew it. Then pull the crown out. Avoid applying undue force when pulling. The watch loses its water resistance while the crown is unscrewed. After performing a crown operation, fully screw the crown back in.



## If your watch has a rotary bezel...

You can rotate the bezel to align its ▼ mark with the minute hand. Then you will be able to tell how much time has elapsed since aligning the ▼ mark.



## Using the Stopwatch

The stopwatch measures elapsed time in 1-second increments up to 29 minutes, 59 seconds.

### Elapsed time



### Important!

- Do not operate the stopwatch with the crown pulled out.

### Note

- An elapsed time operation will stop automatically at the end of 30 minutes.

## Correcting the 0 Positions of the Hands

Perform the following procedure if the stopwatch hands do not return to their 0 (zero) positions when you reset the stopwatch.

Pull the **Crown** out to Click 2.

Each press of **(A)** advances the **Stopwatch Second Hand** one second. Press until the hand is aligned with 12 o'clock.

- Holding down **(A)** advances the hand at high speed.
- Pressing **(B)** moves the **Stopwatch Minute Hand** to the 0 position.

After all of the hands are the way you want, push the **Crown** back in.

### Important!

- Timekeeping stops while the crown is pulled out. Correct the current time setting after performing the above operation.

## Specifications

Module No.	Accuracy at normal temperature (per month)	Battery type	Battery life (30 minutes stopwatch operation per day)
5567	±20 seconds	SR626SW	Approx. 2 years

**Stopwatch:** Measuring Capacity: 29'59" (30 minutes)  
Measuring Unit: 1 second  
Measurements: Elapsed time

Specifications are subject to change without notice.